CERTIFIED LAND CORNER RESTORATION

Index No. B-13

State of Wisconsin
County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 20th day of September, 1976, I found evidence of the N 1/16 corner of Section 3 and 4 Township 37, North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claflin

Herb Wagoner

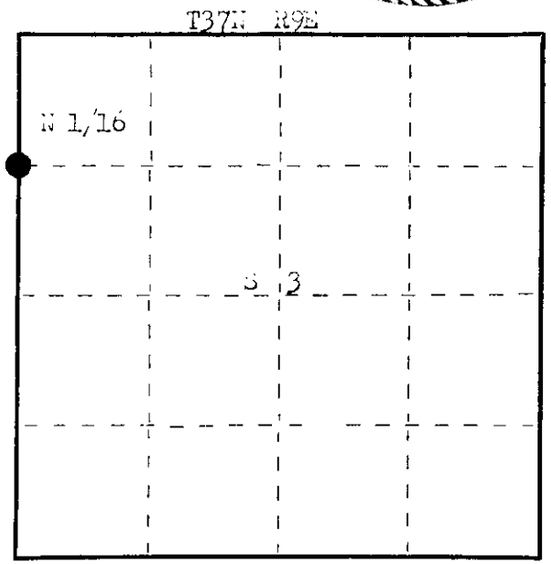

○ = Corner monument restored.

History of original corner establishment:

Corner established by H. Loftus and Goddard, RLPCo surveyors, in 1956. Ran line N 55½° W 4' Lks. 17.75 chains from Section Corner 3, 4, 9 and 10, to close out 11 links West of Section Corner. Corrected bearing N 7° 31' W.
Set N 1/16 corner at 31.41 chains North and 9 links East. Marked Offs - Black Spruce 4" N 85° 30' E 9-3/4 links and Black Spruce 4" W 30° W 31½ links.

Description of corner evidence found:

Recovered 3/4" iron pipe with 2" x 2" square brass cap.
Monument projects 10" above ground. Cap stamped: N 1/16 3/4 | 3/3 RLPCo
Also recovered 3" squared cedar post scribed N 1/16 S3.
Recovered BST - Black Spruce 4" (6") N 85° 30' E 9.75 links, scribed N 1/16 S 3T.
Black Spruce 4" (6") W 30° W (N 25° W) 31.51 links, scribed N 1/16 W 4 BT.

Description of monument and accessories I established to perpetuate the original location of this corner.
As Lipco's monument was in excellent condition and firmly set, we left it in place.
Added T37N R9E to stamping on cap.
No additional accessories established.

Dated at Rhinelander, Wis., this 30th day of September, 1976.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 9th day of November, 1976 at 10:35 o'clock A M.

Doris Verage Kuehn
(Register of Deeds)

By ..... Deputy

FORM 985 H. C. MILLER CO., MILWAUKEE

37090430000