

CERTIFIED LAND CORNER RESTORATION

Index No. U-13

State of Wisconsin

County of Oneida

} ss.

I Philip T. Hansen

, do hereby

certify that on the 27th day

of December, 1976, I found

evidence of the Section

corner of Sec. 9, 10, 15 & 16

Township 37 North, Range


9 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner

Resident witnesses:

Jim Clafin

Herb Wagoner

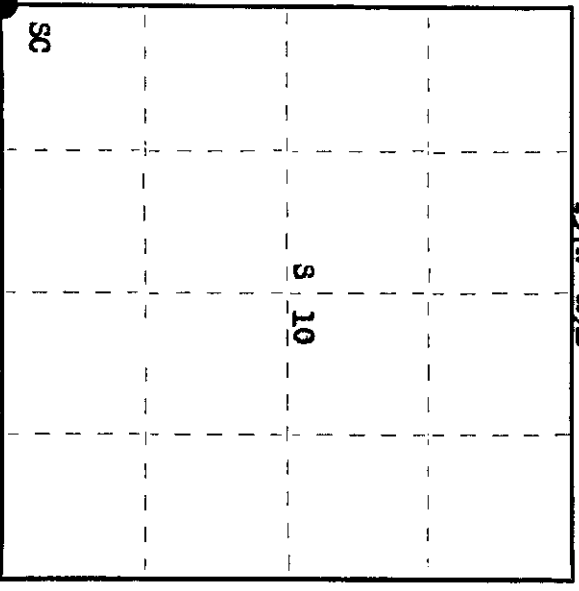

○ = Corner monument restored.

History of original corner establishment:

Original Corner established by Wm. E. Dougherty, Deputy Surveyor, in 1863, from which Birch 8" bears N 20° W 34 links and White Pine 10" bears S 62° E 39 links.

Corner recovered by N. Loftus, Ripco Surveyor, in 1958. He tied into a corner at this location. No mention of what was found, nor did he mention setting any BFs.

Description of corner evidence found:

Recovered 2" iron pipe with 4" square brass cap in good condition and securely in ground.

Cap stamped:

Recovered OBfS - Cedar 8" S 60° E 33.6 links, scribed S15 T37 R9

Cedar 8" N 21° W 25.5 links, scribed S9 BT.

T37N R9E
S9 | S10
S16 | S15
R1PCO

Description of monument and accessories I established to perpetuate the original location of this corner.

As corner recovered was securely in ground, it was left in place.

Monument projects 28" above ground.

NBTs - Cedar 6" S13° E 37.5 links, scribed SC BT.

Cedar 6" S 36° W 37.7 links, scribed SC BT.

Dated at Rhineland, Wis., this 17th day of January, 1977

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 10th day of February, 1977 at 10:00 o'clock A. M.

Steven Wayne Fischer
(Register of Deeds)

By Joseph M. Berman Deputy

3709090000