

CERTIFIED LAND CORNER RESTORATION



Index No. **H-15**

3709101020

State of Wisconsin }
County of **Oneida** } ss.

I **Phillip T. Hansen** do hereby certify that on the **27th** day of **December** 19 **76**, I found evidence of the **SC 1/16** corner of **Section 10** Township **37** North, Range **9 East**, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Ran Claflin
Herb Wagoner

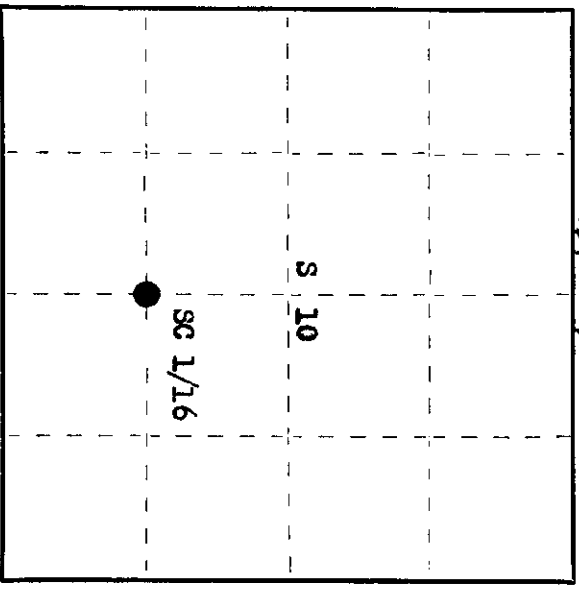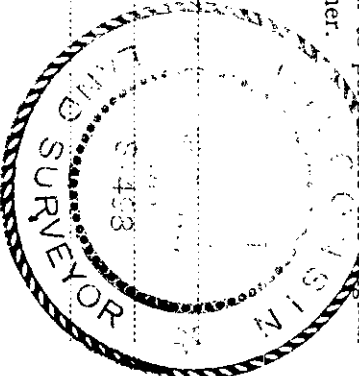

○ = Corner monument restored.

History of original corner establishment:


Corner established by N. Loftus, Ripco Surveyor, in 1958. Ran a random line S 2° W from established N 1/4 corner 78.905 chains to close out 32 links east of S 1/4 corner. Established center 1/4 corner and set SC 1/16 at 59.18 1/2 chains 24 links west. Marked Black Spruce 3" N 33° E 6.25 links and Black Spruce 3" S 35° E 42.5 links. Set iron pipe with brass cap.

Description of corner evidence found:

Recovered 1" iron pipe with 2" square brass cap in good condition and firmly in ground.
Recovered OBF - Black Spruce 3" (6") N 33° E (N 39° E) 6.25 links scribed OS 1/16 S10 BT.
Black Spruce 3" S 35° E 42.5 links, now a stump.

Description of monument and accessories I established to perpetuate the original location of this corner.
As the iron pipe was recovered in good condition, it was left in place.

Monument projects 18" above ground. Cap stamped:
NET - White Spruce 8" S 22° W 31.0 links, scribed 1/16 BT.



Dated at **Rhinelander**, Wis., this **17th** day of **January**, 19 **77**

Signature **Phillip T. Hansen** Title **Registered Land Surveyor** Registration No. **5498**
County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of **Oneida**, I hereby certify that the within instrument was filed in this office for record on the **18th** day of **February**, 19 **77** at **10** o'clock **A**. M.

Steve George Tucker
(Register of Deeds)

By **Joseph M. Berner** Deputy