

CERTIFIED LAND CORNER RESTORATION

Index No. G-14

History of original corner establishment:

Corner established by N. Loftus, Ripco Surveyor, in 1958. Ran the N-S 1/4 line & E-W 1/4 line to establish the C 1/4 corner. Set W.C. 1/16 equidistant at 19.265 chains. Set 1" iron pipe and marked BTs - Tamarack 10" S 48° E 28-3/4 links and Tamarack 6" N 65° W 38-1/2 links.

Description of corner evidence found:

Recovered 1" iron pipe with 2" square brass cap in good condition and firmly in ground.
Recovered BTs - Tamarack 10" (12") S 48° E 28.75 links (29.5 links) Tamarack 6" (8") N 65° E 38.5 links (N 61 W), scribing not visible.

Description of monument and accessories I established to perpetuate the original location of this corner. As monument was recovered in good condition, it was left in place.

Monument projects 24" above ground. Added T37N R9E to brass cap, now stamped: NBT - Tamarack 10" N 38° E 39.0 links, scribed 1/16 BT.

T37N R9E
W 1/16
C S10 C
RIPCO

State of Wisconsin

County of Oneida

} ss.

I Phillip T. Hansen, do hereby certify that on the 7th day of January, 1977, I found evidence of the WC 1/16 corner of Section 10



Township 37, North, Range 9 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Charlton

Herb Wagoner

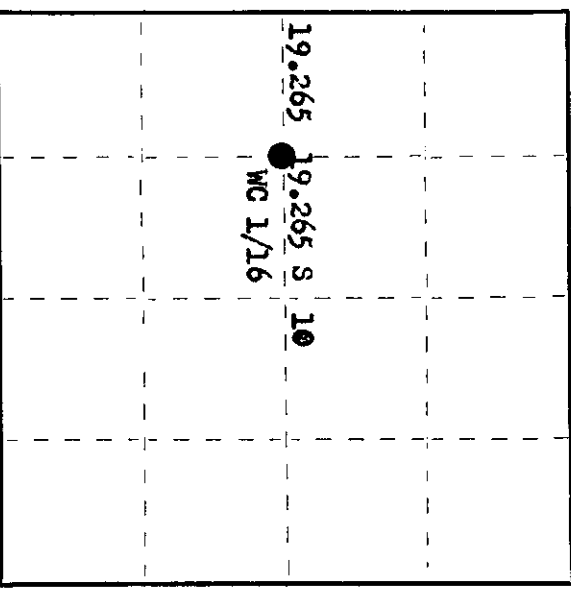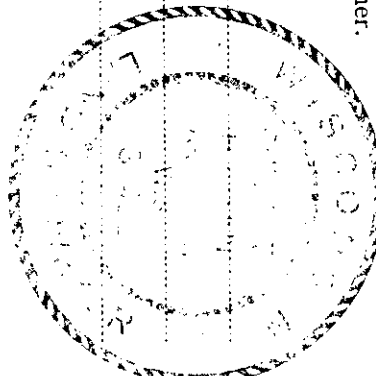

○ = Corner monument restored.

Dated at Rhinelander, Wis., this 18th day of January, 1977.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 16th day of February, 1977 at 10 o'clock A. M.

Deanna L. George
(Register of Deeds)

By Herb Wagoner Deputy

3709 102030