

CERTIFIED LAND CORNER RESTORATION

Index No. M-1

State of Wisconsin

County of Oneida } ss.

I, Philip T. Hansen, do hereby

certify that on the 29th day

of May, 1979, I found

evidence of the S 1/16

corner of Sections 13 and 18

Township 37, North, Range


9 & 10 East, Fourth Principal Meridian,

as described hereon; and that from this evidence

I established a new monument and accessories

as described hereon to perpetuate the original

location of this corner.

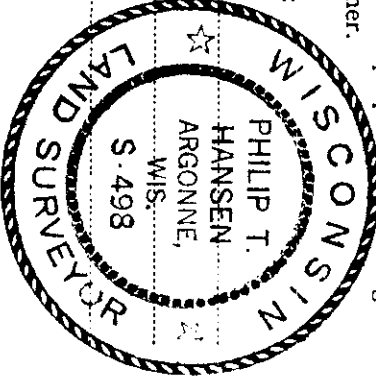

Resident witnesses:

Jim Clafflin

Herb Wagoner

History of original corner establishment:
Corner established by N. Loftus, Ripco Surveyor.
No notes on the establishment of this corner.

Description of corner evidence found:

Recovered Ripco's 3/4" iron pipe with 2" brass cap in excellent condition.

Monument projects 2' above ground - cap stamped:


Recovered OBT -

Tamarack 9" N67°W 52.5 links, scribed S 1/16 BT.

T37-9 | T37-10
S 1/16 | S 1/16
S13 | S18
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.
Monument left in place as recovered.
Monument sets 46.0 links west of centerline at Roosevelt fire lane.
Marked NBT -

Tamarack 5" S64°W 77.6 links, scribed 1/16 BT.

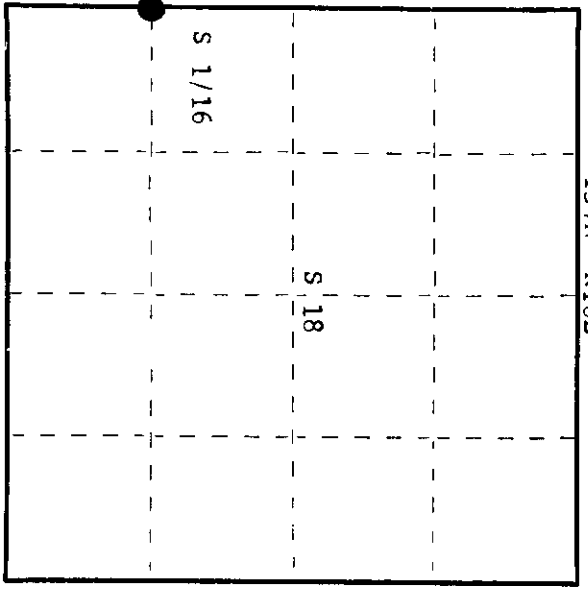

○ = Corner monument restored.

History of original corner establishment:

Corner established by N. Loftus, Ripco Surveyor.

No notes on the establishment of this corner.

Description of corner evidence found:

Recovered Ripco's 3/4" iron pipe with 2" brass cap in excellent condition.

Monument projects 2' above ground - cap stamped:

Recovered OBT -

Tamarack 9" N67°W 52.5 links, scribed S 1/16 BT.

T37-9 | T37-10
S 1/16 | S 1/16
S13 | S18
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.
Monument left in place as recovered.
Monument sets 46.0 links west of centerline at Roosevelt fire lane.
Marked NBT -

Tamarack 5" S64°W 77.6 links, scribed 1/16 BT.

Dated at Rhineland, Wis., this 18th day of June, 1979.
Signature: Philip T. Hansen Title: Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)
Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 17th day of August, 1979
at 1:20 o'clock P. M.
Deane Mearns Kuehn
(Register of Deeds)

By: _____ Deputy