

CERTIFIED LAND CORNER RESTORATION

Index No. K-1

State of Wisconsin

County of Oneida } ss.

History of original corner establishment:
Corner established by N. Loftus, Ripco Surveyor.
No records or notes on the establishment of this corner.


I Phillip T. Hansen, do hereby
certify that on the 29th day
of May, 1979, I found
evidence of the N 1/16
corner of Sections 13 and 18
Township 37, North, Range
9 & 10 East, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Description of corner evidence found:
Recovered 3/4" iron pipe with 3" square brass cap in good condition and securely set.
Recovered B.Spruce 6" S57°E 16.2 links, scribed N 1/16 S18 BT.
Monument projects 2' above ground - cap stamped:


T37-9 | T37-10
N 1/16 S13 | S18

RIPCO

Resident witnesses:
Jim Clafflin
Herb Wagoner

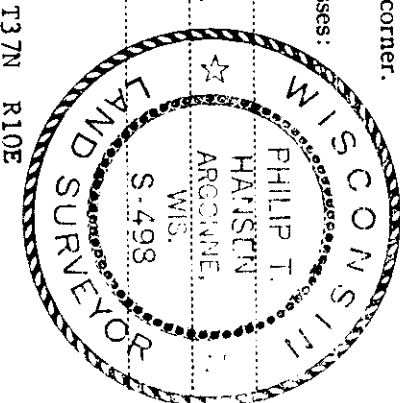

Description of monument and accessories I established to perpetuate the original location of this corner.
Monument left in place as recovered.
Monument sets 32 links east of Roosevelt fire lane.
Marked NBT - Red Pine 5" S89°W 81.2 links, scribed 1/16 BT.

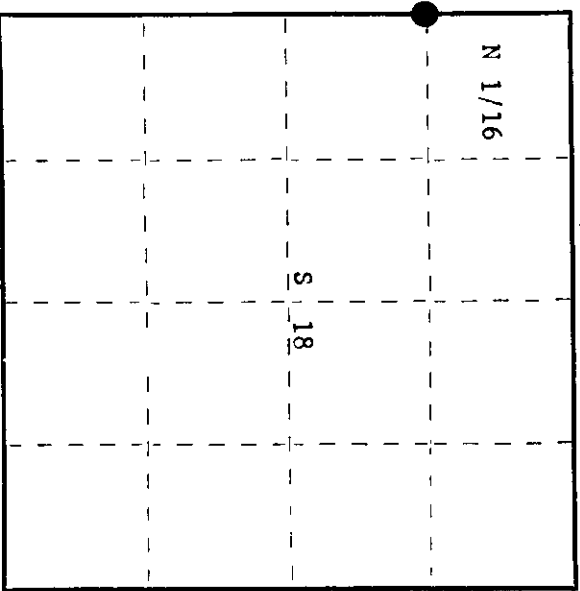

○ = Corner monument restored.

Dated at Rhinelander, Wis., this 18th day of June, 1979

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
County Surveyor, Registered Land Surveyor, or other duly authorized official
Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 7th day of July, 1979
at 1:00 o'clock P. M. I hereby certify that the within
Deanna DeAge (Register of Deeds) Deanna DeAge

By: _____ Deputy

3709133080