

State of Wisconsin

County of Oneida } ss.



I Phillip T. Hansen, do hereby certify that on the 14th day of January, 19 77, I found evidence of the Quarter corner of Section 13 & 14 Township 37, North, Range 9 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clarlin

Herb Wagoner

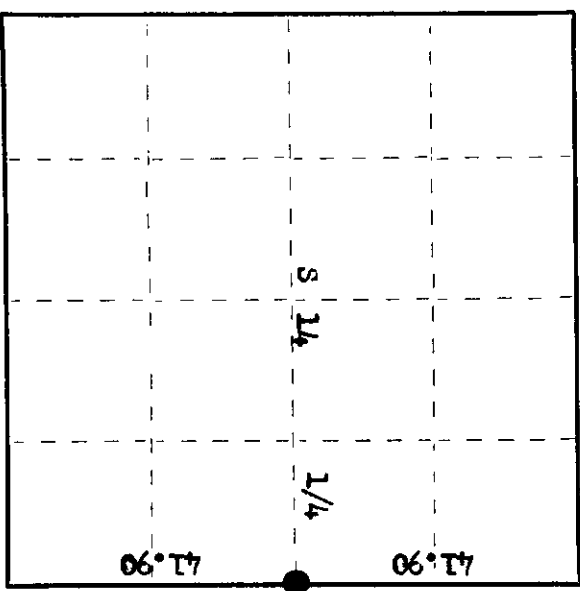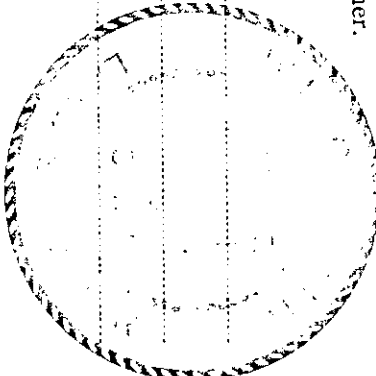

○ = Corner monument restored.

History of original corner establishment:

Original Corner established by Wm. E. Dougherty, Deputy Surveyor, in 1863, from which Birch 7th bears N 13° W 4.3 links and Yellow Pine 12th bears S 56° E 72 links. N. Loftus, Ripco Surveyor, re-established corner in 1955. Ran a random line S 7° W 83.80 chains to close out 30 links west of old hub in swamp. Set 1/4 corner at 41.90 chains, 15 links east. Set iron post, no record of B.Ts.

Description of corner evidence found:

Recovered 2 1/2" iron pipe with 4" square brass cap in good condition and firmly in ground.

Recovered OBTs - Balsam 8" N 40° E 39.3 links, scribed 1/4 SL3 BT.
Balsam 6" S 70° W 53.2 links, scribed, but not legible.

Description of monument and accessories I established to perpetuate the original location of this corner.

As monument was recovered in good condition, it was left in place.

Monument projects 30" above ground. Cap stamped:

OBTs - Cedar 6" N 86° E 62.1 links, scribed 1/4 BT. T37N R9E
White Spruce 6" S 28° E 26.0 links, scribed 1/4 BT. 1/4S SL4 SL3
RIPCO

Dated at Rhinelander, Wis., this 18th day of January, 1977

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 24th day of February, 19 77 at 10 o'clock A. M.

Debra Heritage Kuehn
(Register of Deeds)

By: _____ Deputy