

CERTIFIED LAND CORNER RESTORATION


Index No. **N-8**

State of Wisconsin } ss.
 County of Oneida

I, Philip P. Hansen, do hereby certify that on the 22nd day of April, 1976, I found evidence of the W 1/16 corner of Section 17 and 20 Township 37 North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker
Jim Clafin
Herb Wagoner

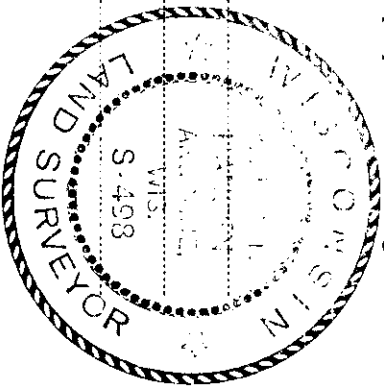


History of original corner establishment: Corner established by St. Regis (Ripco) Surveyors, Goddard and Drivas, in 1961. From recovered 1/4 run random line N 38° 45' W 180 distance of 42.94 chains to intersect old section corner on line. Set iron pipe in road bed of gravel road at 21.47 chains. Marked BTs - white Pine 7" S 18° W 43 1/2 lks and W. Pine 7" S 40° W 45-3/4 lks.

Description of corner evidence found: Recovered W. Pine Bts to intersect for location of pin in road. Unable to recover same. Recovered W. Pine 7" (10") S 18° W 43.5 lks, scribed W 1/16 BT, W. Pine 7" (12") S 40° W 45.75 lks, scribed W 1/16 BT.

Description of monument and accessories I established to perpetuate the original location of this corner. Set 1" x 2 ft. iron pipe in road for true corner 6" below surface of road. Set 1 1/2" x 5" iron pipe with brass cap for witness Corner 50 lks south of Corner. Projects 18" above ground. Cap stamped. Pipe and BTs painted blue.

498
T37N R9E
W 1/16 S 17 "C.
N 50 lks.
CFI - 1970

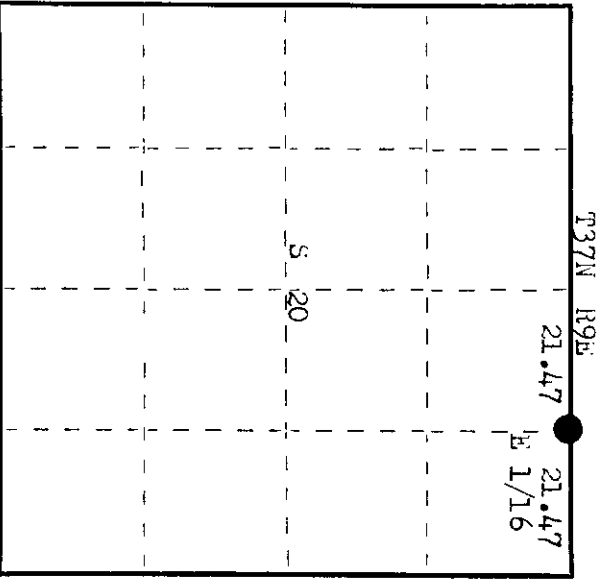

○ = Corner monument restored.

Dated at Oneida, Wis. this 29th day of June, 1976

Signature Philip P. Hansen Title Registered Land Surveyor Registration No. 2498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, 23rd day of July, 1976.
 Instrument was filed in this office for record on the 10:00 o'clock P. M.

Donna Bernage Kuehn
 (Register of Deeds)

By _____ Deputy

3709170010