CERTIFIED LAND CORNER RESTORATION

Index No. L-9

3709172000

State of Wisconsin } ss.
County of Oneida

I Philip T. Hansen, do hereby certify that on the 25th day of August, 1976, I found evidence of the quarter corner of Section 16 - 17 Township 37, North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claflin

Herb Wagoner

WISCONSIN PHILIP T. HANSEN ARGONNE, WIS. S-498 LAND SURVEYOR

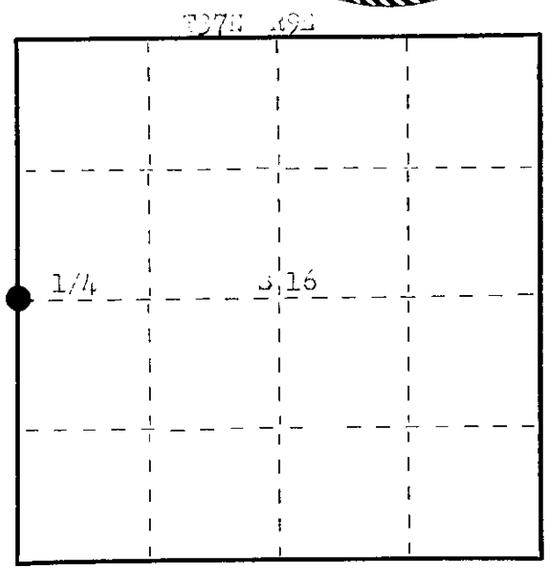

○ = Corner monument restored.

History of original corner establishment: Original Corner established by Wm. L. Dougherty, Deputy Surveyor, in 1857, from which W.Pine 10" bears N 29° E 42 links, Elm 8" bears N 33° W 45 links.
Corner re-established by Drivas, Ripco Surveyor, in 1962, from recovered SE Section 17, ran a random line N to NE Corner. Set 1/4 Corner at 41.472 chains, set 4 x 4" tamarack post in creek. Set reference pipe 50 links east. No BTs available.

Description of corner evidence found:
Recovered 2½" iron pipe with alloy cap stamped:
The monument projects 20" above ground.
This is a witness corner.
The post set in creek bottom was not recovered.
No BTs were recovered.

T37N R9E
1/4
S17 S16
W 50 lks.
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.
Drove a 1" pipe in creek for true corner. Corner projects 4" above current water level.
From Ripco's W.C. set a 1" iron pipe due west 50.0 links.
Set a 1" iron pipe with brass cap N 48° W 50 links from true corner, stamped:
Witness Corner projects 30" above ground.
W.C. and reference mark painted blue.

S498
S 48° E
W C
50 lks to Cor.
CPI-1976

Dated at Rhinelander, Wis., this 16th day of September, 1976

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 9th day of November, 1976 at 10:30 o'clock A M.

(Register of Deeds)

By ..... Deputy

FORM 985 H. C. MILLER CO., MILWAUKEE