CERTIFIED LAND CORNER RESTORATION

Index No. R-16

3709220010

State of Wisconsin } ss.
County of Oneida

I Philip T. Hansen, do hereby certify that on the 12th day of June, 1980, I found evidence of the E 1/16 corner of Sections 22 and 27 Township 37, North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses.

Glen Barker

Jim Claflin

WISCONSIN PHILIP T. HANSEN ARGONNE, WIS. S-498 LAND SURVEYOR

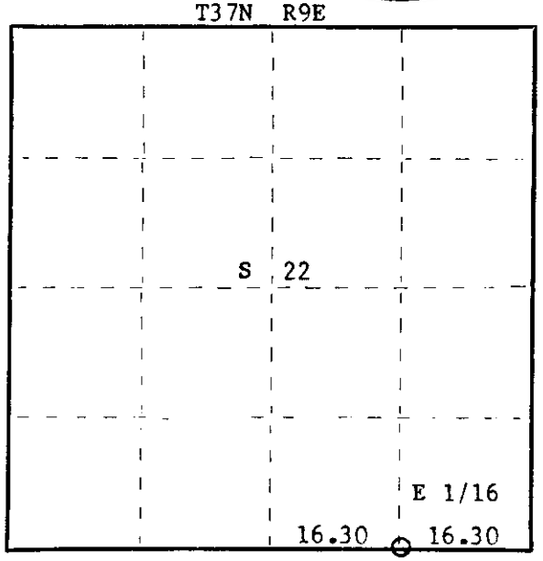

○ = Corner monument restored.

History of original corner establishment:

Corner established by W. Smith, Ripco surveyor.
Ran random line west from recovered section corners 22, 23, 26 and 27 at 10°E declination 32.60 chains to the S 1/4 post. Set the E 1/16 corner at 16.30 chains intermediate.

Description of corner evidence found:

Recovered Ripco's 3/4" iron pipe with 2" brass cap in good condition.
Monument projects 18" - cap stamped:
Recovered OBT. Red Pine 22" S46°E 58.5 links.

E 1/16 S22/S27 RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.

Left monument in place as recovered.
Marked NBT - B.Spruce 7" N60°E 80.6 links, scribed 1/16 BT.

Dated at Rhinelander, Wis., this 21st day of July, 1980

Signature Philip T Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 20th day of October, 1980 at 1:00 o'clock P. M.

Doris Verage Kuehn
(Register of Deeds)

By ..... Deputy

FORM 965 H. C. MILLER CO., MILWAUKEE