

CERTIFIED LAND CORNER RESTORATION

Index No. P-19

State of Wisconsin }  
County of Oneida } ss.



I Phillip T. Hansen do hereby certify that on the 24th day of February, 1977, I found evidence of the C 1/4 corner of Section 23 Township 37N, North, Range R9 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claflin

Herb Wagoner

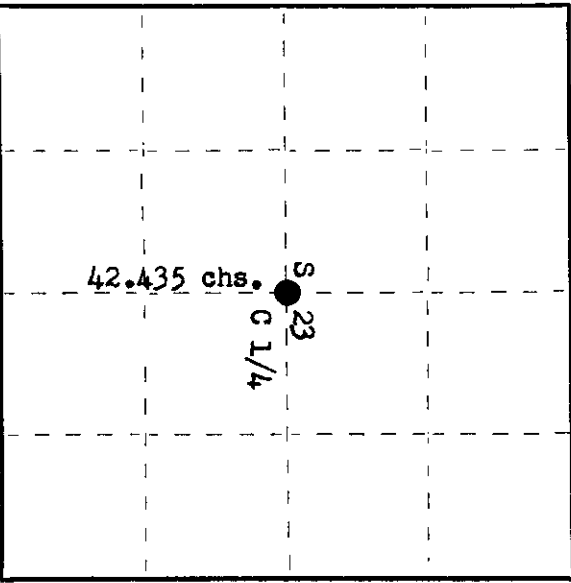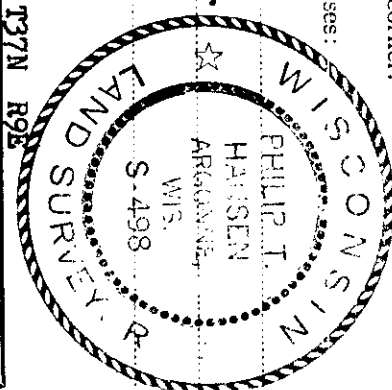

○ = Corner monument restored.

History of original corner establishment:

Corner established by N. Loftus, and crew, in 1955. Ran random line N1/4 N from S 1/4 corner 42.435 chains, closed out 20 links west of C 1/4. Good corner and bearing tree. Set new pipe. No record of BTs established.

Description of corner evidence found:

Recovered 1 1/2" iron pipe with a 4" brass cap, stamped:  
Also recovered an old 5" squared cedar post.  
Recovered OBTS - Maple 9" N58°E 13.0 links, scribing not legible.  
Maple 6" N64°W 39.7 links, scribing C 1/4 S23 BT.  
Monument projects 30" above ground. T37N R9E  
C 1/4 Sec. 23 X  
R1P60

Description of monument and accessories I established to perpetuate the original location of this corner.

As corner was recovered in good condition, it was left in place.  
NBTS - Cedar 8" N 38° W 59.6 links, scribed 1/4 BT.  
Maple 10" S 48° W 42.5 links, scribed 1/4 BT.

Dated at Rhineland, Wis., this 23rd day of March, 1977

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 14th day of April, 1977 at 1:20 o'clock P. M.

Signature Virginia W. Kuehn  
(Register of Deeds)

By: \_\_\_\_\_ Deputy

3709232020