

CERTIFIED LAND CORNER RESTORATION



Index No. **V-15**

3709270020

State of Wisconsin } ss.
County of Oneida

I Phillip T. Hansen, do hereby certify that on the 14th day of February, 1977, I found evidence of the Quarter corner of Sec. 27 & 34 Township 37, North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Jim Claflin
Herb Wagoner

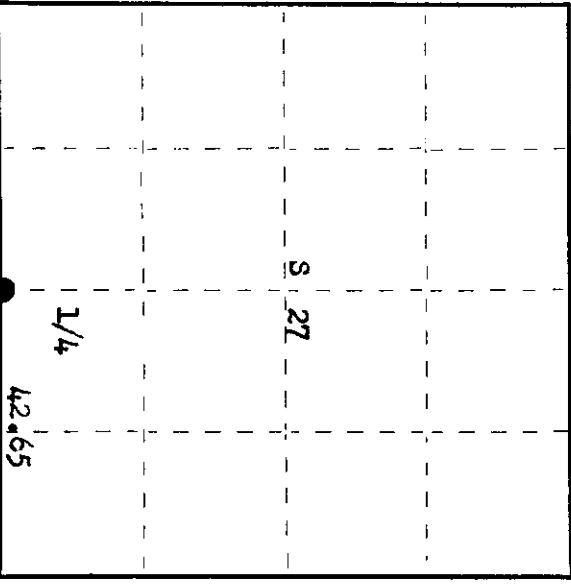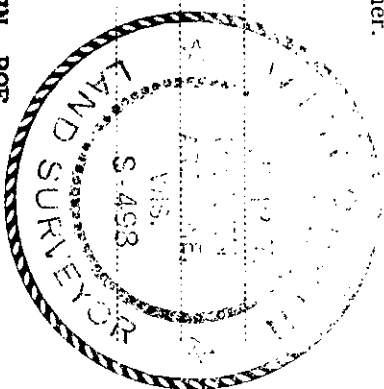

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1863, from which Tamarack 8" bears S 46° E 21 links and Tamarack 12" bears N 42° E 20 links.

Corner recovered by N. Loftus, Ripco Surveyor, in 1961. No mention of any BTs established.

Description of corner evidence found:

Recovered 1 1/2" iron pipe with round alloy cap. Monument was in excellent condition. Also recovered a 5" square cedar post beside it scribed 1/4 S 27-34. Cap stamped:
Recovered 8" Cedar 8" S 41° E 28.0 links, scribed 1/4 S BT.
Monument projects 10" above ground.

T37N R9E
S 1 27
1/4 S 34
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.

As monument was in excellent condition it was left in place.
NBTs - Cedar 10" N 47° E 41.0 links, scribed 1/4 BT.
Tamarack 5" N 2° E 26.4 links, scribed 1/4 BT.

Dated at Rhineland, Wis. this 17th day of March, 1977

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 23rd day of March, 1977
at 3:00 o'clock P. M.

Doris Verage-Kushner
(Register of Deeds)

By _____ Deputy