

CERTIFIED LAND CORNER RESTORATION

Index No. E-5

State of Wisconsin


County of Oneida } ss.

I Philip T. Hansen do hereby certify that on the 6th day of June, 1977, I found evidence of the Section corner of Sec. 5, 6, 7 & 8 Township 37, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

Jim Claffin

Herb Wagoner

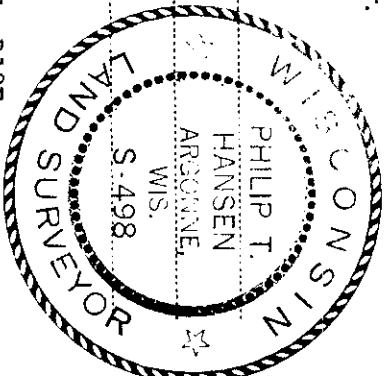

T37N R10E

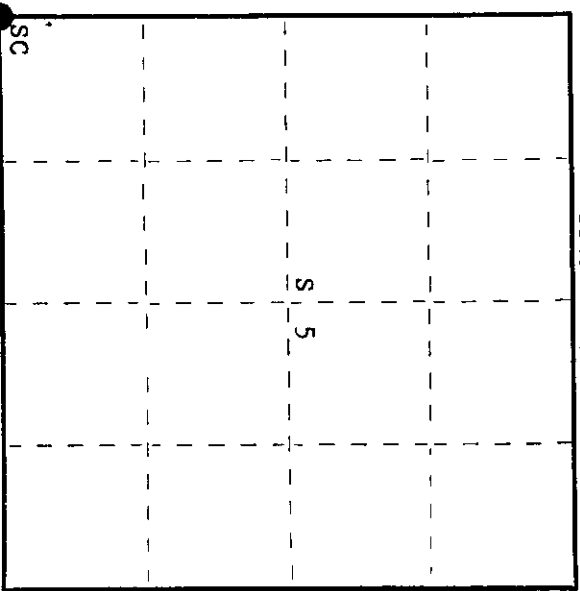

O = Corner monument restored.

History of original corner establishment:

Original Corner established by Wm. Dougherty, Deputy Surveyor, in 1863, from which Spruce 10" bears N82°W, 10 links and Spruce 8" bears N5°E, 13 links. N. Loftus, Ripco Surveyor, recovered Dorr's corner in 1959. Set corner, but no record of any BTs marked.

Description of corner evidence found:

Recovered 1-3/4" iron pipe with 4" square brass cap, stamped: Monument recovered in excellent condition. Monument projects 28" above ground. Recovered OBTs - Black Spruce 7" N44°E, 12.5 links, scribed S5 BT. Black Spruce 8" S80°W, 20.6 links, scribed S7 BT.

T37N R10E  
6+5  
7+8  
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.

Marked NBTs - Black Spruce 7" S30°W, 23.8 links, scribed SC BT. Black Spruce 8" S36°E, 26.2 links, scribed SC BT.

Dated at Rhinelander, Wis. this 8th day of June, 1977

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498  
County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 30<sup>th</sup> day of June, 1977 at 9:00 o'clock A. M.

Doree Savage Kuehn  
(Register of Deeds)

By Joseph M. Boomer Deputy

3710060000

