

CERTIFIED LAND CORNER RESTORATION

Index No. V-2

State of Wisconsin



County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 22nd day of July, 1977, I found evidence of the W 1/16 corner of Section 7 & 18 Township 37, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clafflin

Herb Wagoner

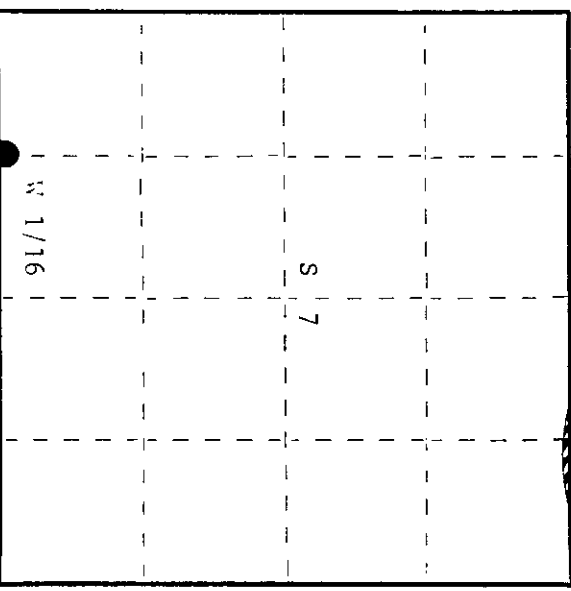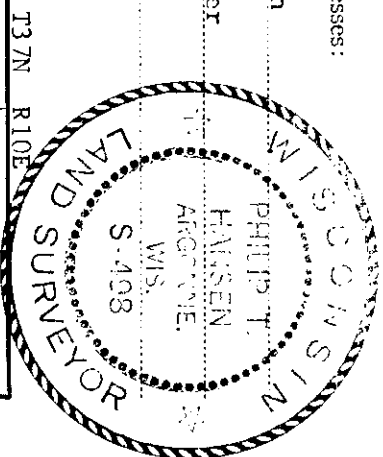

○ = Corner monument restored.

History of original corner establishment:

Corner established by N. Loftus, Ripco Surveyor, in 1958. Ran random line west 275° mag. from Section Corner 7, 8, 19, 18, 96.54 chains to close out 57-3/4 links north of Section Corner on range line. Set W 1/16 at 63.42 chains, 423 links south. Marked Aspen 6" S22°E, 20 links.

Description of corner evidence found:

Recovered 1" iron pipe with 2" square brass cap in excellent condition.
Recovered aspen 6" (9") S22°E, 20.0 links, scribed 1/16 RT.
Cap stamped:
Monument projects 28" above ground.

N 1/16 S + 7
S 18
RIFCO

Description of monument and accessories: I established to perpetuate the original location of this corner.

Added scribing T37N R10E to brass cap.
Marked NPTs - Red **Pine** 4" N27°W, 17.0 links, scribed RT.
Maple 5" S86°W, 15.8 links, scribed 1/16 RT.

Dated at Rhineland, Wis., this 29th day of July, 1977.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
instrument was filed in this office for record on the 5th day of August, 1977
at 9:00 o'clock A. M.

Doris Savage Kuehn
(Register of Deeds)

By: _____ Deputy