

CERTIFIED LAND CORNER RESTORATION



Index No. G-9

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 9th day of February, 19 78, I found evidence of the Quarter corner of Sections 8 & 9 Township 37, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Jim Claflin
Herb Wagoner

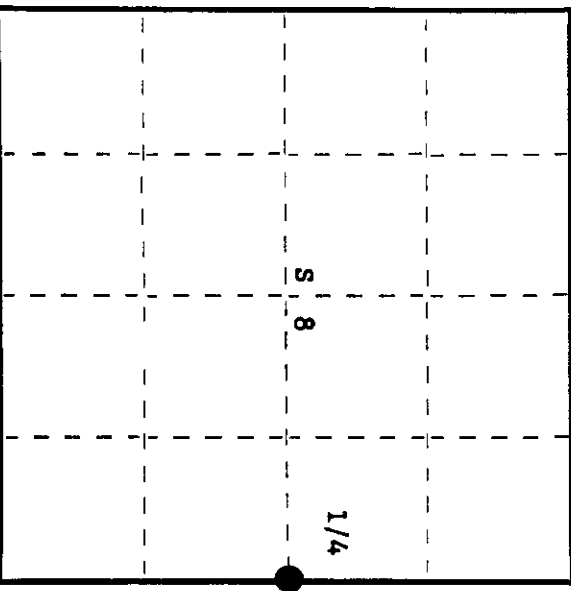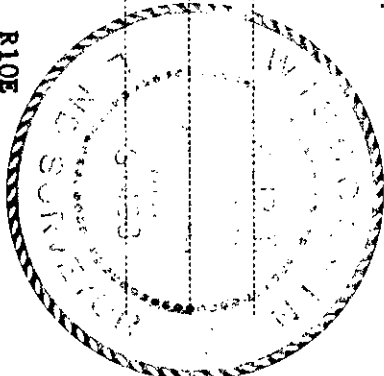

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1859.

Corner recovered by Hall in 1934. Claims to have recovered the original corner. Set a 6" square cement monument with 3/4" brass cap.

Description of corner evidence found:

Recovered Hall's 6" square cement monument with brass cap, stamped: No evidence of any BT's recovered. Monument recovered in excellent condition. Monument projects 6" above ground.

Orig. 1/4 Sec.
T37N
S + S
8 + 9
R10E
Hall-1939

Description of monument and accessories I established to perpetuate the original location of this corner.

Monument left in place as recovered.
Marked NBT's - Cedar 10" S38°W, 40.3 links
Hemlock 10" S89°W, 26.0 links
Cedar 8" N32°W, 35.0 links
Cedar 8" N17°E, 58.2 links
all scribed 1/4 BT.

The land east of corner and section line has been clear cut.

Dated at Rhinelander, Wis., this 6th day of March, 19 78

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 13th day of March, 19 78
at 2:30 o'clock P. M.

Doree George Kuehn
(Register of Deeds)

By _____ Deputy