

CERTIFIED LAND CORNER RESTORATION



Index No. **V-21**

State of Wisconsin }
County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 23rd day of February, 19 78, I found evidence of the Section Corner corner of Sections 25, 26, 35, 36 Township 37, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker
Jim Clafin
Herb Wagoner

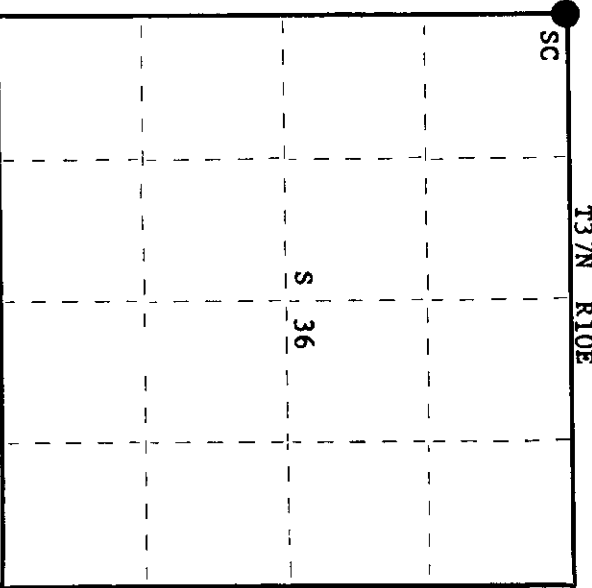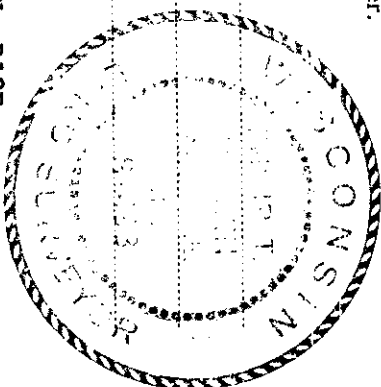

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Government Deputy Surveyor, in 1859, from which white pine 10" bears S70°E, 29 links; birch 10" bears N33°W, 17 links. Corner re-established by D.H. Vaughan, County Surveyor, in 1906 from which white pine 28" bears N5°E, 32½ links; white pine 16" bears N32°W, 47 links. Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1949. Old scribed post and Vaughan's BT white pine 28" N5°E, 32½ links stump - scribe marks plain - white pine 16" N32°W, 47 links - stump - scribe marks plain.
Set new cedar post.

Description of corner evidence found:

Recovered H.C. Lawrence's 6" cedar post squared and scribed S25, S26, S35, S36. Post standing in poor condition with rock cairn around it. Recovered old BT stumps, white pine 28" N5°E, 32.5 links, now decayed - white pine 16" N32°W, 47 links, now decayed.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced post with a 2½" Bernitsen A-1 Federal Monument, stamped:
Placed rock cairn around pipe.
Projects 6" above ground.
NBT's - Maple 8" N9°W, 45.6 links
Maple 6" N55°E, 49.9 links
Maple 7" S42°E, 48.2 links
Maple 8" S59°W, 24.4 links
scribed S.C. BT.

S498
T37N R10E
26 25
35 36
1978

Dated at Rhineland, Wis., this 8th day of March, 19 78.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 13th day of March, 19 78
at 2:30 o'clock P. M.

Doris Neugebauer
(Register of Deeds)

By: _____ Deputy

3710260000