

CERTIFIED LAND CORNER RESTORATION

Index No. **A-22**

State of Wisconsin

County of **Oneida** } ss.



I **Phillip T. Hansen**, do hereby certify that on the **23rd** day of **February**, 19 **78**, I found evidence of the **W 1/16** corner of **Sections 1 & 36** Township **36 & 37**, North, Range **10 East**, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Clafflin

Herb Wagoner

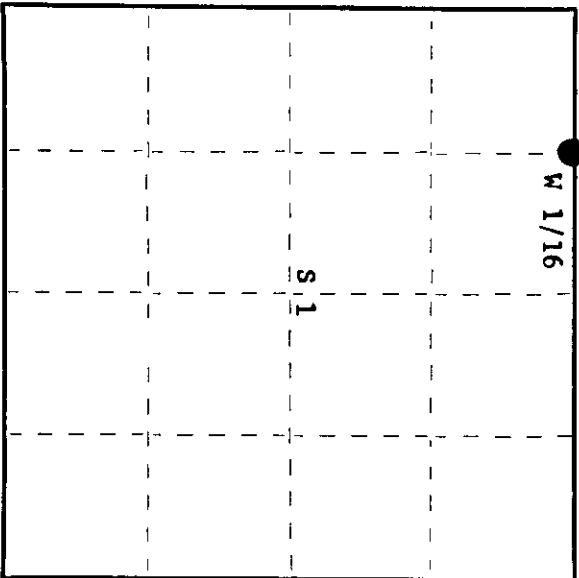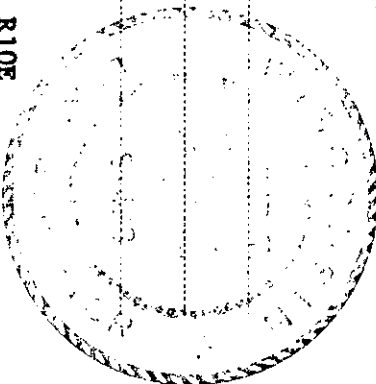

○ = Corner monument restored.

History of original corner establishment:

Corner established by H.C. Lawrence, Registered Land Surveyor, in 1949. Ran random line east from section corner 1, 2, 35, 36 - 40.24 chains to close out 82 links north of 1/4 corner.

Set W 1/16 at 20.12 chains and 41 links south.

Set cedar post.

B.T.'s - none, nothing suitable.

Description of corner evidence found:

Recovered H.C. Lawrence's 6" cedar post squared and scribed W 1/16, S1 W 1/16, S36, standing in poor condition.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced post with a 1 1/2" o.d. iron pipe with 2" brass cap, stamped:

Projecting 24" above ground.

NBT's - White Spruce 9" N21°W, 35.2 links

White Spruce 8" N68°W, 12.8 links

scribed 1/16 BT.

S498
T37N R10E
W 1/16 S+36
T36N R10E
CPI-1978

Dated at **Rhineland**, Wis., this **7th** day of **March**, 19 **78**

Signature: *Phillip T. Hansen* Title: **Registered Land Surveyor** Registration No. **S-498**

(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of **Oneida**, I hereby certify that the within instrument was filed in this office for record on the **13th** day of **March**, 19 **78** at **2:30** o'clock **P.** M.

Denise Wang Fisher
(Register of Deeds)

By: _____ Deputy

3710360030