

CERTIFIED LAND CORNER RESTORATION

Index No. E-24

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 24th day of October, 1975, I found evidence of the E-1/16 corner of Sections 1 and 12 Township 37, North, Range 11 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

Glen Barker

Jim Claflin



T37N R11E

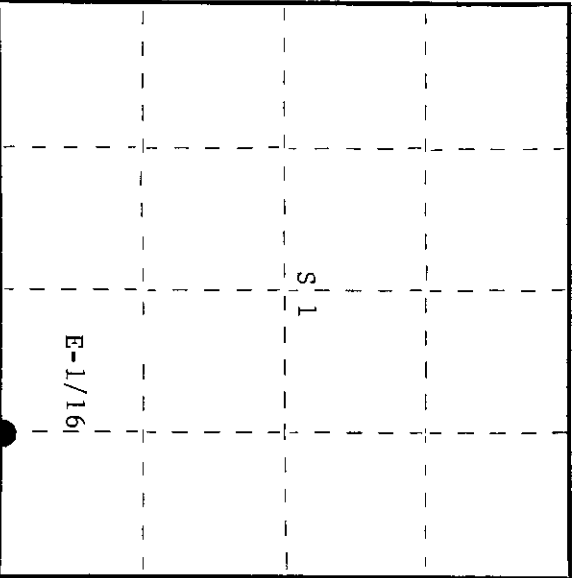

○ = Corner monument restored.

History of original corner establishment:

Corner established by V.M. Maine, County Surveyor, in 1938. Set E-1/16 at 21.46-1/2 (Equidistant) between 1/4 corner and SE corner 12 on range 1 line. Established NBT's: Maple 6" N12°E 21 links and Maple 8" S69°E 62-1/2 links. Recovered by H.C. Lawrence, Registered Land Surveyor, in 1955. Maple BT still standing but dead. Set new cedar post and established NBT: Sugar 18" N55°E 94-1/2 links.

Description of corner evidence found:

Recovered Lawrence's 5" cedar post, squared and scribed E-1/16 S1, E-1/16 S12 in fair condition. Also old squared cedar post lying beside it. Recovered OBT's: Sugar 14" S69°E 62.5 links - scribed E-1/16 BT, Sugar 18" N55°E 94.5 links - scribing grown over.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced Lawrence's cedar post with 1" OD iron pipe with 2" brass cap stamped - S498  
Post projects 18" above ground. T37N R11E  
No additional accessories established.

E-1/16 S1  
S 12

CPI-1975

Dated at Rhineland Wis. this 7th day of November, 1975.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida hereby certify that the within instrument was filed in this office for record on the 9th day of November at 1:30 o'clock P. M. 1976

Lorisa Terage Fuchs  
(Register of Deeds)

By \_\_\_\_\_ Deputy

3711010010