

CERTIFIED LAND CORNER RESTORATION

Index No. E-22

State of Wisconsin



County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 24th day of October, 1975, I found evidence of the W-1/16 corner of Sections 1 and 12 Township 37 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Clafflin

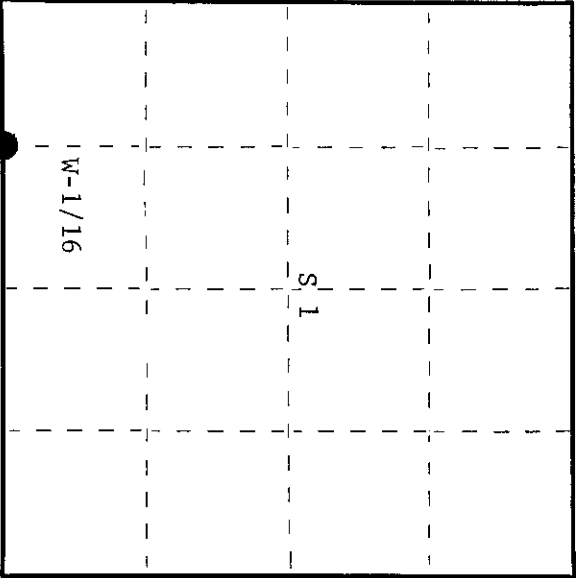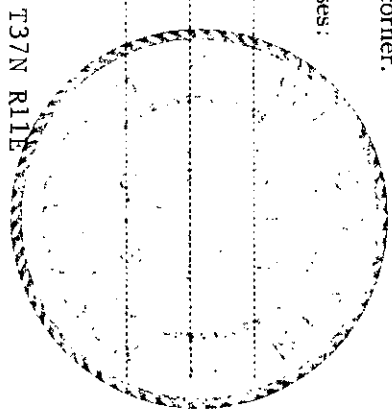

○ = Corner monument restored.

History of original corner establishment:

Corner re-established by H.C. Lawrence, Registered Land Surveyor. Recovered old stake on line. Set new 5" cedar post and established NBT's: Hemlock 16" N86°W 62 links and Basswood 18" S17°E 55-1/2 links.

Description of corner evidence found:

Recovered 5" cedar post, squared and scribed W-1/16 S1, W-1/16 S12 in fair condition. Recovered OBT's: Hemlock 16" (14") N86°W 62 links - scribed S1 BT, now dead, Basswood 18" S17°E 55.5 links - scribed S12 BT.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced Lawrence's wooden post with 1" iron pipe with 2" brass cap stamped - S498
Pipe projects 18" above ground. T37N R11E
NBT's: Sugar 11" S52°W 37.6 links - scribed 1/16 BT,
Sugar 6" S51°W 30.8 links - scribed 1/16 BT. E-1/16 S1
S12

CPI-1975

Dated at Rhinelander Wis. this 7th day of November, 1975

Signature: *Phillip T. Hansen* Title: Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 9th day of November, 1975 at 1:30 o'clock P.M.

Terri Savage Kuehn
(Register of Deeds)

By: Deputy

3711010030