# CERTIFIED LAND CORNER RESTORATION

Index No. E-19

State of Wisconsin } ss.
County of Oneida }

I Philip T. Hansen, do hereby certify that on the 14th day of October, 1975, I found evidence of the Quarter corner of Sections 2 and 11 Township 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Claflin

WISCONSIN PHILIP T. HANSEN ARGONNE, WIS. S-498 LAND SURVEYOR

T37N R11E

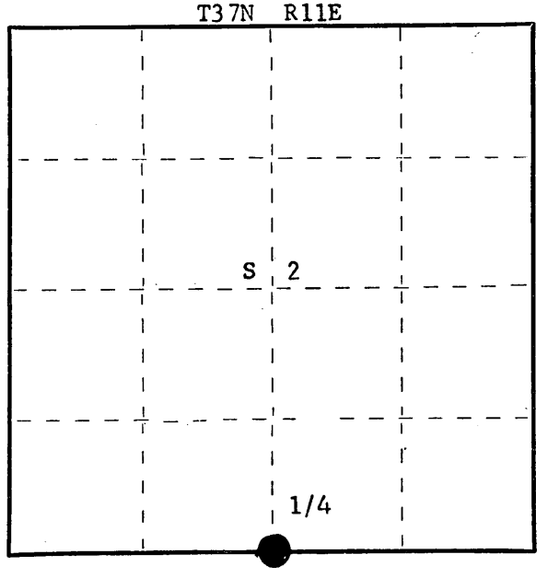


○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1859, from which Willow 5" bears N24°E 13 links and Willow 5" bears S78°E 24 links.
This corner re-established by J.J. Melendy in 1910. He ran the line between Sections 2 and 11 from the SW corner to the SE corner. Set a new post and marked NBT's - Tamarack 11" N23°E 5 links and Pine 12" N86°W 16 links.
Corner recovered by H.C. Lawrence in 1946. Recovered Melendy's post and his BT's. Set a new post.

Description of corner evidence found:

Recovered Melendy's 3" post, squared and scribed 1/4S S2 in very poor condition.
Recovered H.C. Lawrence's 5" cedar post, squared and scribed 1/4S S2, 1/4S S11, two links west of Melendy's post. The BT's ties to Melendy's post fit perfectly.
Recovered OBT's -
Tamarack 11" N23°E 5 links, now a 5' stub.
Pine 12" N86°W 16 links, now down and decayed, scribing partly visible.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced Melendy's old post with 2-1/2" iron pipe with brass cap, stamped:
Marked NBT's -
Cedar 10" S12°E 197.7 links, scribed 1/4 BT.
This is an open marsh area. No other trees suitable for BT's.

T37N R11E
1/4 S 2
S 11
S498

Dated at Rhinelander, Wis., this 15th day of October, 1979

Signature Philip T. Hansen. Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 30th day of July, 1980 at 10:15 o'clock a M.

Doris Verage Kuehn
(Register of Deeds)

By ..... Deputy

37N 11E

FORM 985 H. C. MILLER CO., MILWAUKEE