

CERTIFIED LAND CORNER RESTORATION

Index No. E-17

State of Wisconsin


County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 16th day of October, 1975, I found evidence of the Section 1 corner of Sections 2, 3, 10, and 11 Township 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

Glen Barker

Jim Claflin

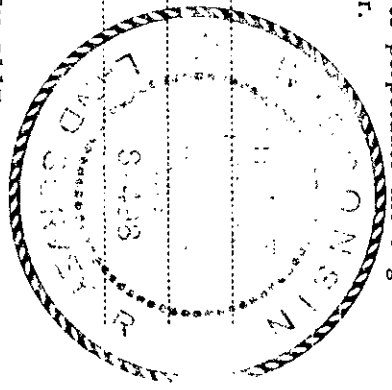

T37N R11E

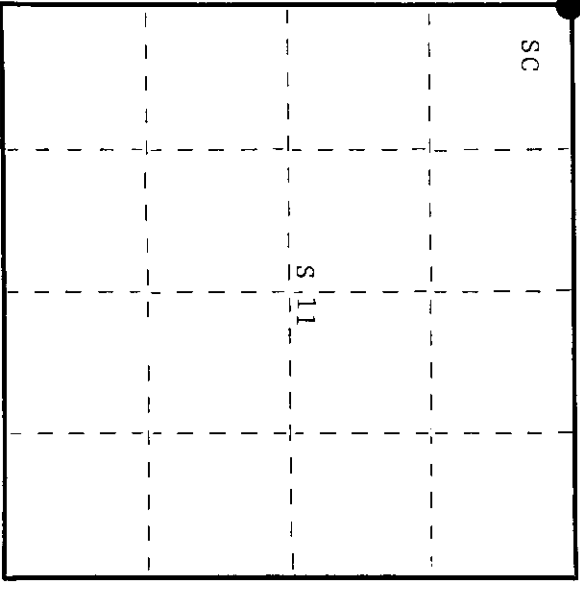

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Government Deputy Surveyor, in 1859 from which willow 5" bears S21°W, 15 links and willow 5" bears S5°E, 30 links. Corner re-established by D.H. Vaughan, County Surveyor. Corner re-established by J.J. Melendy, Gagen Lumber Company surveyor. This did not agree with Vaughan's corner, being S18°W, 2.32 chains. J.J. Melendy's corner verified in court by L.R. Badeau who swore under oath that Melendy had found the point of original stake. This corner is duly accepted and recognized as the true corner. Corner recovered and re-monumented by V.M. Maine, County Surveyor, in 1935.

Description of corner evidence found:

Recovered 2-1/4" iron pipe with brass cap set by V.M. Maine. T37N R11E  
Also recovered Melendy's old point driven in beside the iron pipe.

No OBT's were recovered as this sits in an open marsh.

3 | 2  
10 | 11

Description of monument and accessories I established to perpetuate the original location of this corner.

As Maine's iron pipe with brass cap was recovered in good condition, it was left as found.

Set a 1" OD iron pipe with 2" brass cap for witness corner 20 links south of the Section Corner, brass cap stamped -

W | C

Post and witness corner painted blue. N 20 lks.

Dated at Rhineland, Wis., this 28th day of October, 1975.

Signature Phillip T. Hansen, Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida  
Instrument was filed in this office for record on the 11th day of November, 1976  
at 10 o'clock A. M.

Lorne George Fuchin  
(Register of Deeds)

By ..... Deputy

3711030000