CERTIFIED LAND CORNER RESTORATION

Index No. E-15

37110300 20

State of Wisconsin } ss.
County of Oneida

I Philip T. Hansen, do hereby certify that on the 25th day of January, 1978, I found evidence of the Quarter corner of Section 3 & 10 Township 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Claflin

Herb Wagoner

WISCONSIN LAND SURVEYOR S-498

T37N R11E

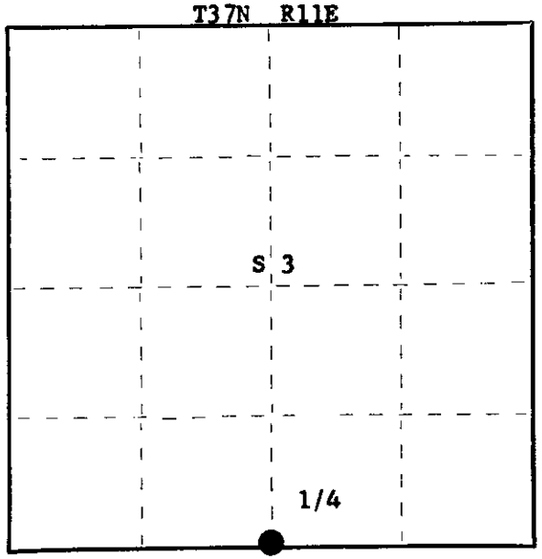

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1859, from which Spruce 8" bears S35°E, 8 links; Spruce 9" bears N10°E, 7 links.
This corner recovered and remonumented by J.J. Melendy in 1910. Claimed to have found the original government spruce stump SE.
This corner recovered by V.M. Maine in 1935. Found Melendy's post and remains of spruce BT, but bearing and distance O.K. Set iron pipe with brass cap, but no trees available for BT's.

Description of corner evidence found:

Recovered the iron pipe 2½" with brass cap set by V.M. Maine with the upper portion of Melendy's post wired to it. A large rock cairn around the base. Scribe marks still visible on one side of Melendy's post.
Iron pipe projects 18" above rocks. Cap stamped:
No evidence of any BT's recovered.

T37N R11E
S3
1 + 4
S10

Description of monument and accessories I established to perpetuate the original location of this corner.

As Maine's monument was recovered in perfect condition, it was left in place.
Monument painted blue.
Marked NBT's - Black Spruce 8" S74°W, 9.1 links
Black Spruce 7" S84°E, 27.1 links
Black Spruce 7" S29°E, 8.6 links
Black Spruce 7" S48°W, 37.6 links, all scribed BT.
Corner sets 48 links north of centerline of old Hiles RR grade.
Now grown up with alder and small balsam.

Dated at Rhinelander, Wis., this 27th day of January, 1978.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 6th day of February, 1978 at 9:30 o'clock A M.

Doris Verage Kuehn
(Register of Deeds)

By ..... Deputy

FORM 985 H. C. MILLER CO., MILWAUKEE