CERTIFIED LAND CORNER RESTORATION

Index No. E-13

State of Wisconsin } ss.
County of Oneida }

I Philip T. Hansen, do hereby certify that on the 17th day of February, 19 78, I found evidence of the Section Corner corner of Sections 3, 4, 9 & 10 Township 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Claflin

Herb Wagoner

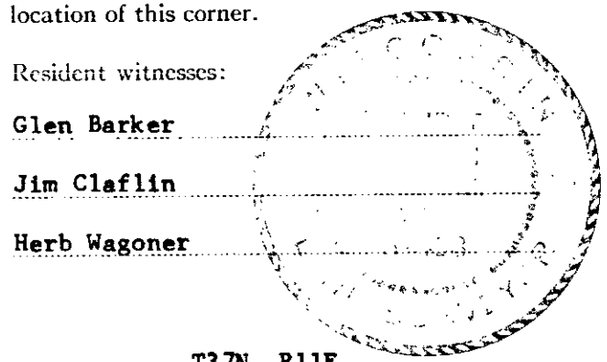

○ = Corner monument restored.

History of original corner establishment: Original corner established by Wm. E. Dougherty, Government Deputy Surveyor, in 1859, from which tamarack 6" bears N60°E, 5 links. Corner re-established in 1910 by J.J. Melendy from which tamarack 6" bears N30½°E, 27 links; tamarack 8" S85°E, 14 links; spruce 5" S37°W, 19 links; spruce 7" N45°W, 22 links.
Corner recovered by V.M. Maine, County Surveyor, in 1935. Set a 2½" iron pipe with brass cap in place of wooden post.
Marked NBT's - spruce 5" N85°W, 58-3/4 links
spruce 7" N57°E, 55-1/4 links
tamarack 4" N31°E, 26½ links
tamarack 5" S85°E, 14½ links

Description of corner evidence found:
Recovered 2½" iron pipe with brass cap, stamped: 7 3 / 9 10
Projects 24" above ground.

Also found Melendy's old post point in muck along side of pipe.
Recovered evidence of old BT's - spruce 5" N85°W, 58-3/4 links, now a 3' stub, scribe marks visible, but not legible.
spruce 7" N57°E, 55½ links, rotted stump.
tamarack 4" N31°E, 26½ links, rotted stump.

Description of monument and accessories I established to perpetuate the original location of this corner.
As Maine's pipe is in perfect condition and securely set, it was left in place. Stamped T37N R11E on top side of cap.

NBT's - tamarack 8" S70°W, 29 links, scribed SC BT.
tamarack 7" N15°E, 24 links, scribed SC BT.
tamarack 7" S43°E, 26.1 links, scribed SC BT.
tamarack 7" N33°W, 58.2 links, scribed SC BT.

Dated at Rhinelander, Wis., this 7th day of March, 19 78

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 13th day of March, 1978 at 2:30 o'clock P. M.

Doris Verage Kuehn
(Register of Deeds)

By ..... Deputy

37110400000

FORM 985 H. C. MILLER CO., MILWAUKEE