

CERTIFIED LAND CORNER RESTORATION


E 10 Index No. E-10

State of Wisconsin } ss.  
County of Oneida }


History of original corner establishment:  
Corner established by an unknown source.

I Philip T. Hansen do hereby  
certify that on the 1st day  
of May 1975 I found  
evidence of the W-1/16  
corner of Sections 4 and 9  
Township 37 North, Range  
11 East Fourth Principal Meridian,  
as described hereon; and that from this evidence  
I established a new monument and accessories  
as described hereon to perpetuate the original  
location of this corner.

Resident witnesses

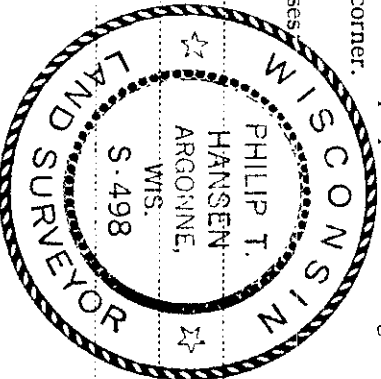

T37N R11E

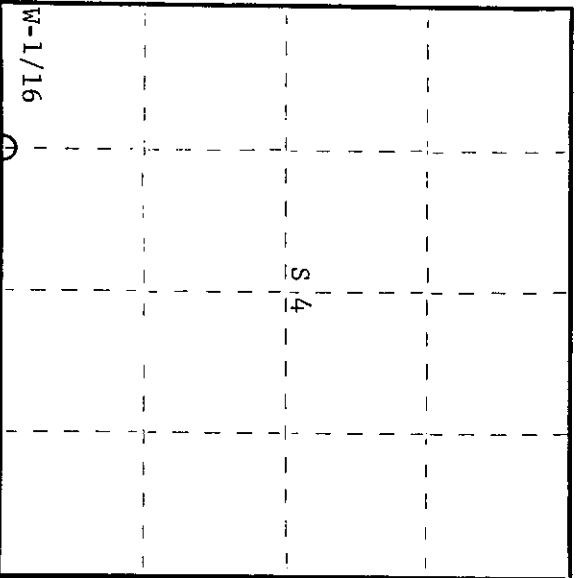

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

History of original corner establishment:

Corner established by an unknown source.

Description of corner evidence found:

Recovered a 4" cedar post, squared and scribed 1/8S in poor condition but standing in center of rock carron. Also a 1" iron pipe was driven in beside the stake.  
Recovered witness tree: Aspen 12" N45°W 8.4 links and  
White birch 5" N47°E 10 links.

Both trees have beaver blazes. A 1-1/2" iron pipe sets N86°W, 87.6 links.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced old wooden stake in center of rock carron with 1-1/2" OD iron pipe with 2" brass cap stamped -

S498  
T37N R11E

NBT's: White birch 5" S27°W 17.4 links  
White birch 7" N24°W 36.7 links scribed 1/16 BT.

W-1/16  
S 4  
S 9  
CPL-1975

Dated at Rhinelander Wis, this 26th day of June, 1975

Signature: *Philip T. Hansen* Title: Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida  
Instrument was filed in this office for record on the 1st day of October 1975  
at 3:00 o'clock M.

*Thomas George Kuehn*  
(Register of Deeds)

By: Deputy

3711040030