

CERTIFIED LAND CORNER RESTORATION

Index No. C-12

State of Wisconsin

County of Oneida } ss.


History of original corner establishment:
This corner established by Genisot Engineering Company.

I, Phillip T. Hansen, do hereby certify that on the 8th day of December, 1978, I found evidence of the EC 1/16 corner of Section 4, Township 37 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Description of corner evidence found:
Recovered 2" x 3' iron pipe projecting 8" above ground. No cap.
Recovered OBT's -
W. Birch 8" S3°30' W 41.15 ft., now a cut-off stump.
W. Birch 6" (8") S80° W, 23.35', scribing visible.


Resident witnesses:

Glen Barker
Jim Claflin

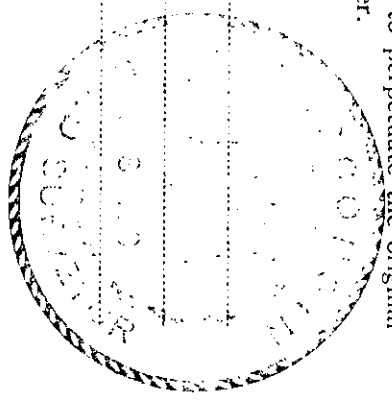

T37N R11E

Description of monument and accessories I established to perpetuate the original location of this corner.
Replaced iron nine with 1 1/2" iron pipe with 2" brass cap.
Projects 18" above ground. Cap stamped:
Marked NBT -
W. Birch 7" S71° E, 43.10 feet
S498
T37N R11E
EC 1/16 S44
CPI-1978

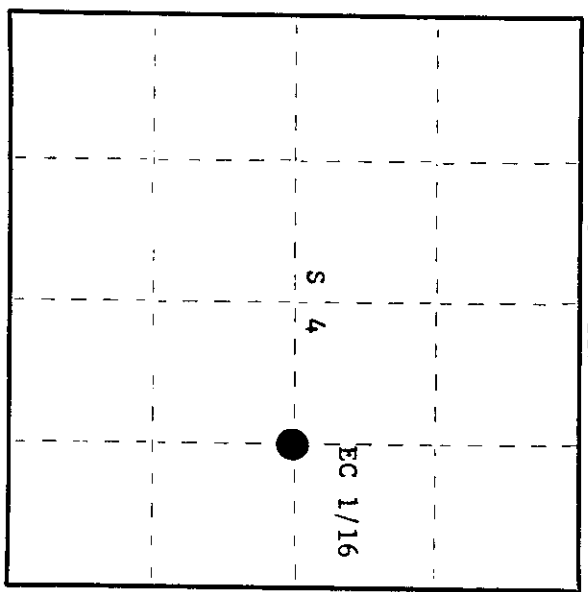

○ = Corner monument restored.

Dated at Rhinelander, Wis., this 11th day of December, 1978.

Signature: *Phillip T. Hansen* Title: Registered Land Surveyor Registration No. S-498
County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 25th day of January, 1979 at 1:50 o'clock P.M.

Debbie Neugebaumer
(Register of Deeds)

By: Deputy

3711042010