

CERTIFIED LAND CORNER RESTORATION

Index No. C-11



History of original corner establishment:
Corner set by Genisot Engineering Company.

State of Wisconsin }
County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 8th day of December, 1978, I found evidence of the C 1/4 corner of Section 4 Township 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker
Jim Clafflin

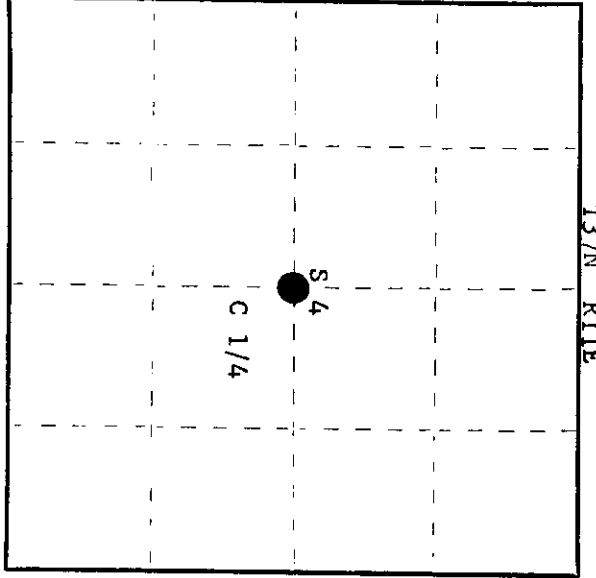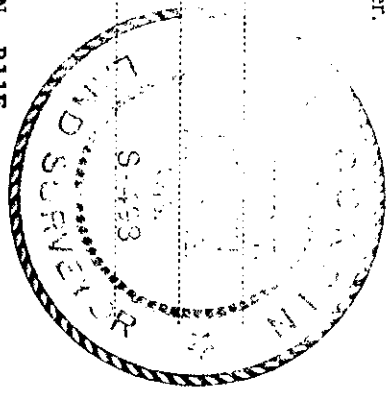

○ = Corner monument restored.

Description of corner evidence found:

- Recovered 2" x 3' iron pipe with large rock cairn around base.
- Recovered OBT's -
- W. Birch 6" S84°E 13.3', now a cut-off stump.
- W. Birch 6" (8") N74°W, 4.7 feet, scribing visible.

Description of monument and accessories I established to perpetuate the original location of this corner:

- Replaced 2" iron pipe with 2 1/2" Bernsten A-1 Federal Monument.
- Monument projects 18" above ground. Replaced rock cairn around base, cap stamped:
- Marked NBT's -
- Maple 8" N3°E, 43.24'
- W. Birch 8" N72°E, 9.25', scribed C 1/4 BT.

T37N R11E
C 1/4 S 4
S498-1978

Dated at Rhineland, Wis., this 11th day of December, 1978.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 25th day of January at 1:30 o'clock P. M. 1979
I hereby certify that the within

Donna George Fisher
(Register of Deeds)

By: Donna George Fisher Deputy

3711042020