

CERTIFIED LAND CORNER RESTORATION

Index No. **C-9**

State of Wisconsin

County of Oneida } ss.



I, Phillip T. Hansen, do hereby certify that on the 2nd day of February, 1978, I found evidence of the Quarter corner of Sections 4 & 5 Township 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Clafflin

Herb Wagoner

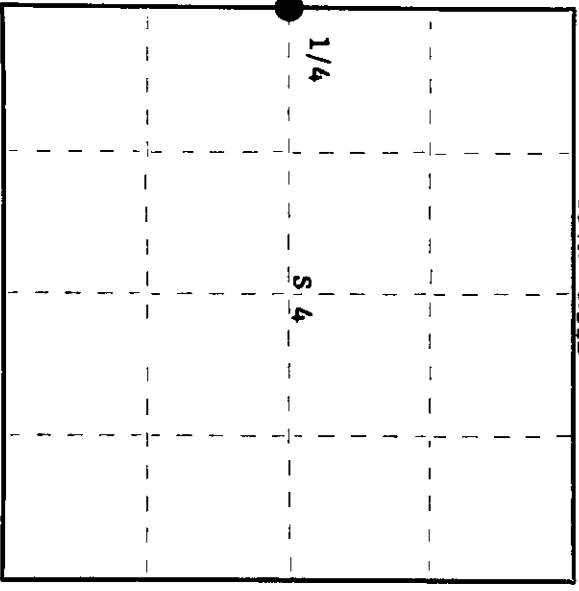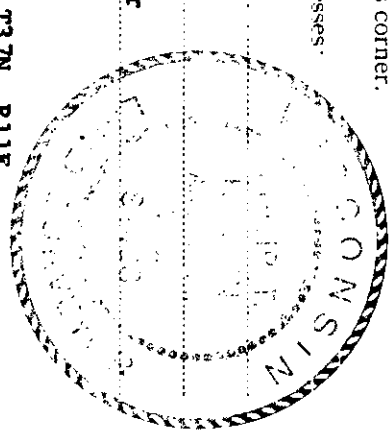

○ = Corner monument restored.

History of original corner establishment: Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1859, from which aspen 12" bears S65°W, 10 links and white birch 12" bears S41°E, 8 links. Corner set by D.H. Vaughan in 1910. Ran random line between Section Corner 4, 5, 8 & 9 to Section Corner 32, 33, 4 & 5. Proportioned 1/4 corner and 1/16 corners. H.C. Lawrence, Registered Land Surveyor, recovered this corner but questioned his proportions for setting his corner (Vaughan's). Section 4, subdivided by Genisot Engineering, using this point for control, set a 2" iron pipe projecting 1' above ground.

Description of corner evidence found:

Recovered H.C. Lawrence's 6" cedar post, squared and scribed 1/4S S4, 1/4S S5 standing beside Genisot's 2" iron pipe which projects 1' above ground.

Recovered: aspen 14", 8' stub, N58°W, 20.2 links, scribed 1/4S5 BT.

maple 5" N16°E, 17.05' 25.833 links, scribed 1/4S4 BT.

maple 4" S53½°E, 11.05' 16.742 links.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced iron pipe with 2½" Bernitsen A-1 Federal Monument, aluminum with magnet in cap and base, projecting 10" above ground. Cap stamped:

Marked NBT's - Sugar Maple 5" S2°W, 40.5 links

Sugar Maple 7" N83°E, 21 links

White Birch 10" S47°W, 54.7 links,

scribed 1/4 BT.

S498
T37N
1/4 S5+S4
R11E
1978

Dated at Rhinelander, Wis., this 7th day of February, 1978

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida at 2:45 o'clock P. M. I hereby certify that the within instrument was filed in this office for record on the 8th day of February, 1978.

By Doree Seeger Funder Deputy
(Register of Deeds)

3711052000