

CERTIFIED LAND CORNER RESTORATION

Index No. J-4

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby

certify that on the 16th day

of February, 19 78, I found

evidence of the E 1/16

corner of Sections 7 & 18

Township 37, North, Range


11 East, Fourth Principal Meridian,

as described hereon; and that from this evidence

I established a new monument and accessories

as described hereon to perpetuate the original

location of this corner.

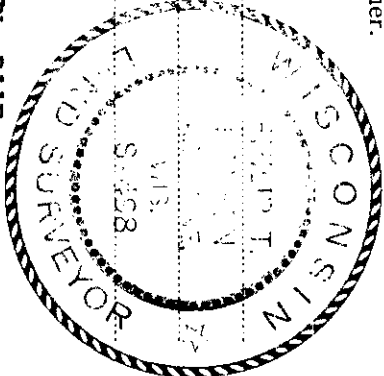


Resident witnesses:

Glen Barker

Jim Claffin

Herb Wagoner

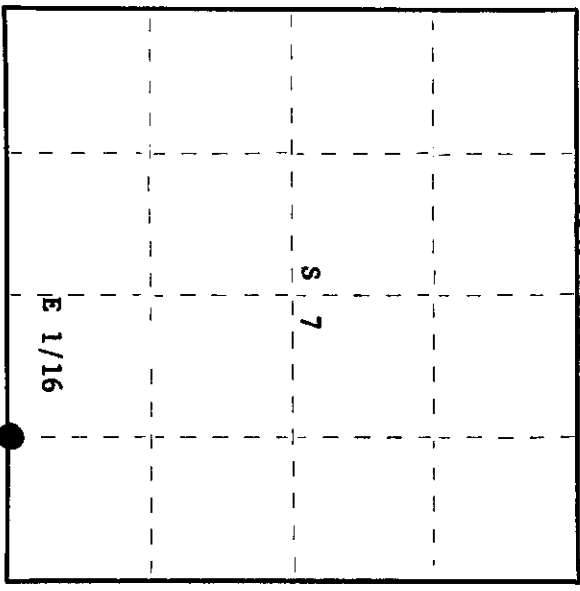

○ = Corner monument restored.

History of original corner establishment:

Corner established by H.C. Lawrence, Registered Land Surveyor, in 1947. Ran random line west from section corner 7, 8, 17 & 18 - 40.96 chains intersect N-S 1/4 line section 18 at 39.51 chains north of C 1/4.

Set E 1/16 at 21 links north of intermediate measure at 20.45 chains. Set tamarack post.

BT's - Dead tamarack 9" N80°W, 69 links
dead tamarack 6" N46°E, 43 links

Description of corner evidence found:

Recovered Lawrence's 4" tamarack post squared and scribed E 1/16, S7 E 1/16, S13 - standing in very poor condition.

Recovered the stumps of tamarack BT's.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced post with a 1 1/2" o.d. iron pipe with 2" brass cap, stamped:

Projecting 8" above ground.

Nothing for BT's, all small black spruce.

Set 5' spruce picket beside pipe for location.

S498
T37N R11E
E 1/16 S 7
ST-18
CPI-1978

Dated at Rhineland, Wis., this 6th day of March, 19 78

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 13th day of March, 19 78 at 2:30 o'clock P. M.

Loraine Wagoner Kuehn
(Register of Deeds)

By _____ Deputy

01007072