

CERTIFIED LAND CORNER RESTORATION

Index No. G-4

State of Wisconsin


County of Oneida } ss.

History of original corner establishment:
Corner established by Genisot Engineering.


I, Phillip T. Hansen, do hereby certify that on the 8th day of December, 1978, I found evidence of the EC 1/16 corner of Section 7 Township 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker
Jim Clafflin

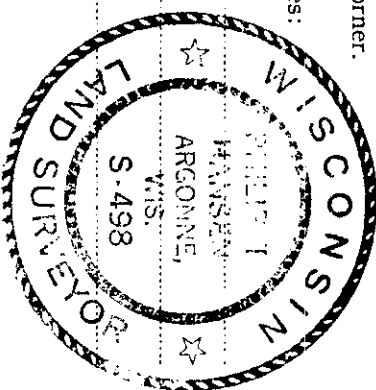

T37N R11E

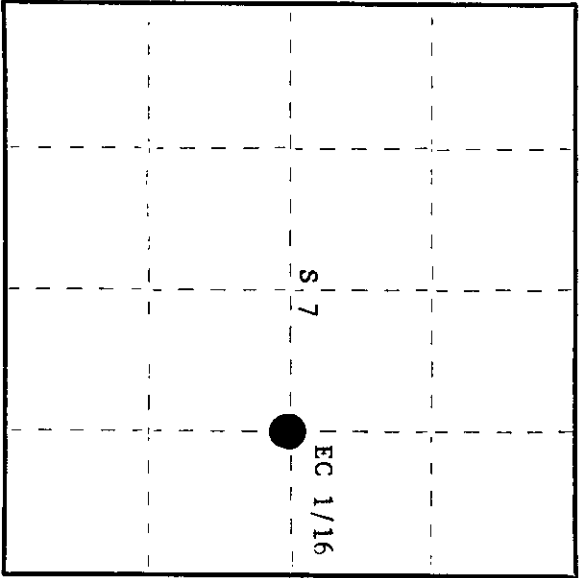

○ = Corner monument restored.

Description of corner evidence found:

Recovered 2" x 3' iron pipe projecting 8" above ground.
Recovered OBT's - W. Birch 8" S3° 30' W 41.15 feet, now a cut off stump.
W. Birch 6" (8") S80° W 23.25 feet, scribed BT.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced iron pipe with 1-1/2" iron pipe with 2" brass cap, stamped:
Monument projects 18".
Marked NBT - W. Birch 7" S71° E 43.10 feet, scribed 1/16 BT.

S498
T37N R11E
EC 1/16 S-7
CPI-1978

Dated at Rhineland, Wis., this 2nd day of January, 1980.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
at 130 o'clock M. 1/24 day of January, 1980
I hereby certify that the within

Terri Lange Fisher
(Register of Deeds)

By: _____ Deputy

3711072010