

CERTIFIED LAND CORNER RESTORATION

Index No. J-17

State of Wisconsin



County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 17th day of October, 1975, I found evidence of the Section corner of S10, S11, S14, and S15 Township 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Clafflin

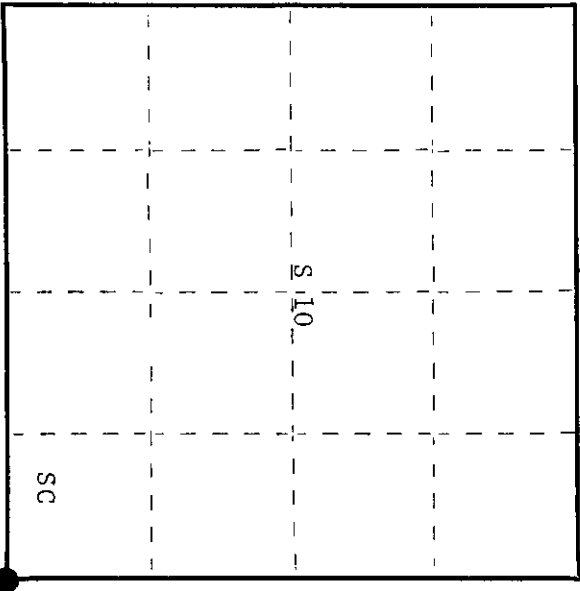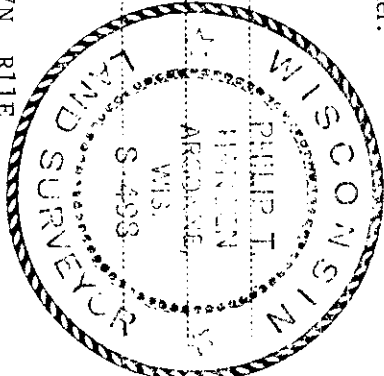

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Government Deputy Surveyor, in 1859 from which tamarack 10" bears S45°W, 6 links and tamarack 10" bears N38°E, 18 links. Corner recovered by V.M. Maine, County Surveyor, in 1935. Claims to have found point of original stake deep in the muck and original BT's down but marks plain. Set new 2½" iron pipe with brass cap and marked NBT's yellow birch 9", N40°E, 22½ links and yellow birch 9", N69°W, 47 links.

Description of corner evidence found:

Corner recovered by H.C. Lawrence, Registered Land Surveyor. Found his iron pipe intact & OBT yellow birch but bearings and distance to BT's did not correspond. Yellow birch 10", N70°E, 24 links; yellow birch 12", N35°W, 47 links. Set new BT yellow birch 8", S5°W, 26½ lks
 Recovered Maltne's iron pipe in good condition but loose, cap stamped - T37N, R11E
 Also found a very old stake beside it believed to have been set by V.A. Melendy.
 Recovered OBT's - Yellow birch 10" N70°E 24.0 links now a decayed stump
 Yellow birch 12" N35°W 47.0 links now a decayed stump
 Yellow birch 8" S5°W 26.5 links scribed S15 BT

Description of monument and accessories I established to perpetuate the original location of this corner.

As the iron pipe was in good condition but loose, we drove support stakes in beside it. Also left Melendy's old post in place.

NBT's - Cedar 8" N23°W 61.4 links scribed SC BT
 Cedar 7" N53°W 65.7 links scribed SC BT

Dated at Rhinelander, Wis. this 23rd day of October, 1975.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
 instrument was filed in this office for record on the 5th day of December, 1975
 at 10 o'clock P. M.

Norma LePage Kuehn
 (Register of Deeds)

By Philip T. Hansen Deputy