

CERTIFIED LAND CORNER RESTORATION


Index No. **6-17**

State of Wisconsin

County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 16th day of October, 1975, I found evidence of the quarter corner of Sections 10 and 11 Township 37 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:  
Glen Barker  
Jim Claflin  
PHILIP T. HANSEN  
ARGONNE, WIS.  
S. 498  
LAND SURVEYOR

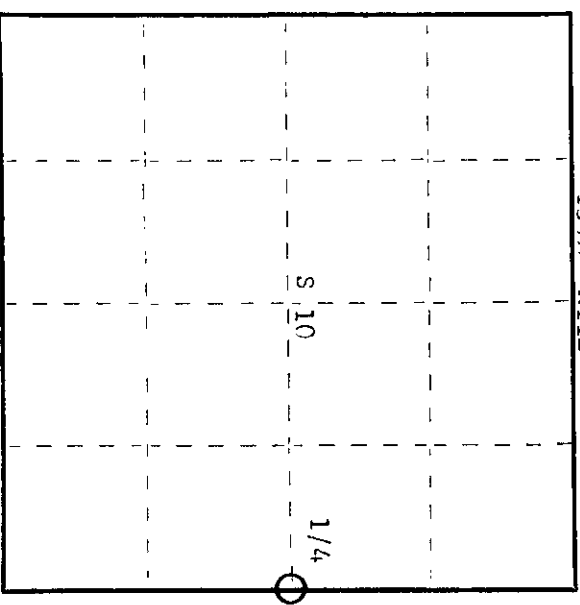

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1859, from which Cedar 8" bears S24°E 10 links and Tamarack 9" bears N32°W 11 links. Corner recovered by J.J. Melendy in 1910. Set post and marked NBT's - Birch 5" S25°W 18-1/2 links; Birch 12" S57-1/2°E 30-1/2 links. Corner recovered by V.P. Paine, County Surveyor. Set a 2-1/2" iron pipe with brass cap, Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1963.

Description of corner evidence found:

Recovered V.P. Paine's 2-1/2" iron pipe in good condition. Also Melendy's point of old stake beside it. Cap stamped:  
Recovered OBT's -  
Yellow Birch 5" S24°W 18.5 links, now dead and decayed,  
some scribe marks visible.  
Yellow Birch 12" S57-1/2°E 30.5 links, now down and decayed.



Description of monument and accessories I established to perpetuate the original location of this corner.

Paine's monument left in place as recovered.  
Marked NBT's - Hemlock 11" N59°E 54.2 links, scribed 1/4 BT.  
Hemlock 12" S59°E 77.5 links, scribed 1/4 BT.

Dated at Rhinelander, Wis. this 15th day of October, 1979

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida  
Instrument was filed in this office for record on the 30th day of July, 1980  
at 10:15 o'clock A.M.

Signature *Doris Waage Fuchs*  
(Register of Deeds)

By Deputy

371110280

