

CERTIFIED LAND CORNER RESTORATION

J-20 INDEX No. J-20

State of Wisconsin



County of Oneida } ss.

I Philip T. Hansen do hereby certify that on the 17th day of July 1975 I found

evidence of the E-1/16 corner of Sections 11 and 14 Township 37 North, Range 11 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

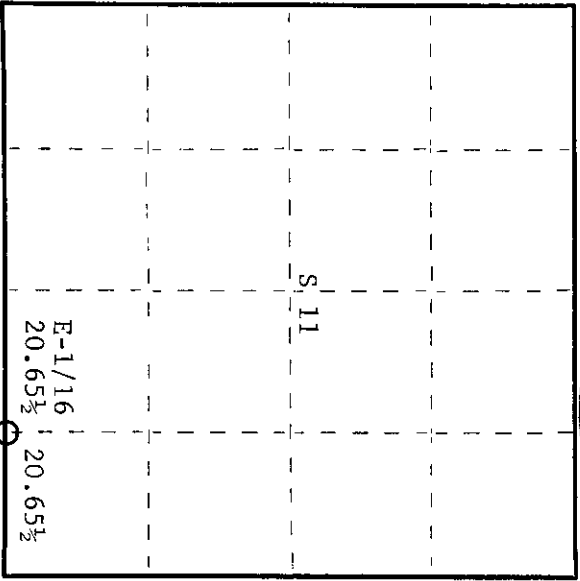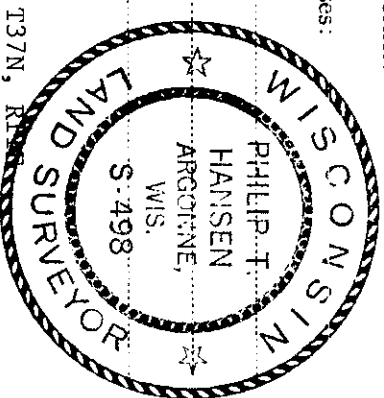

○ = Corner monument restored.

History of original corner establishment:

Corner established by V.M. Maine, Co. Surveyor, in 1935. He ran a random line west from Section Corners 11, 12, 13, and 14 to the S-1/4 Corner. Set E-1/16 Corner on true line, scribed cedar stake from which sugar maple 12", bears S61W, 35 lks. and yellow birch 36", bears S32°W, 45-1/2 lks.

Corner recovered by H.C. Lawrence, Registered Land Surveyor. Recovered Maine's BR's and set new cedar post.

Description of corner evidence found:

Recovered H.C. Lawrence's cedar post, squared and scribed E-1/16 S11, E-1/16 S14, in good condition.


Also old 3" cedar post, squared and scribed 1/8 S lying beside it.

Recovered - Yellow birch 36", S32°W, 45.5 lks., now a 15' stub scribed 1/8 S BT. Sugar maple 12", S61°W, 35 lks., now a decayed stump.

Description of monument and accessories I established to perpetuate the original location of this corner:

Replaced cedar post with 1-1/2" O.D. iron pipe w/2" brass cap stamped -

NBR's Red maple 9", N68°E, 26.5 lks., scribed 1/16 BT. T37N, R11E S498  
 Red maple 10", S45°W, 28 lks., scribed 1/16 BT.



CPI-1975

Dated at Rhinelander, Wis., this 29th day of July 1975

Signature: *Philip T. Hansen* Title: Registered Land Surveyor Registeration No. S-498  
 County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida  
 instrument was filed in this office for record on the 1st day of October 1975 at 3:00 o'clock P.M.

*Donna Berge Tucker*  
 Register of Deeds

By: Deputy

01001110019