

CERTIFIED LAND CORNER RESTORATION

Index No. L-23

State of Wisconsin

County of Oneida } ss.

I, Phillip P. Hansen, do hereby certify that on the 3rd day of August, 1976, I found evidence of the C 1/4 corner of section 13

Township 37, North, Range 11 East, Fourth Principal Meridian,



as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Alan Parker

Jim Martin

herb sagoner

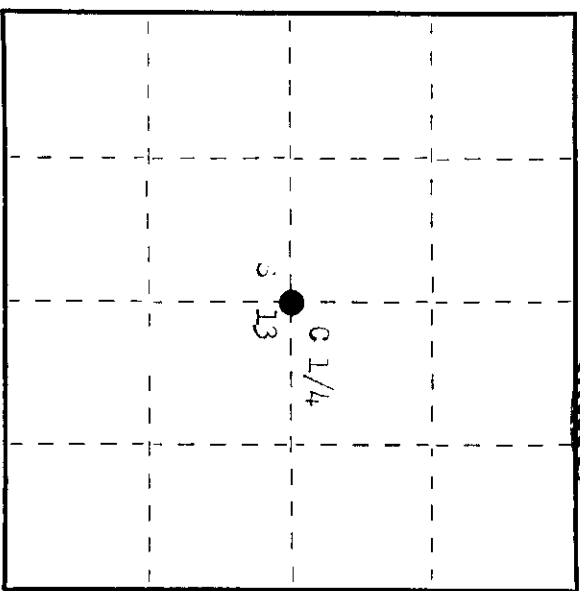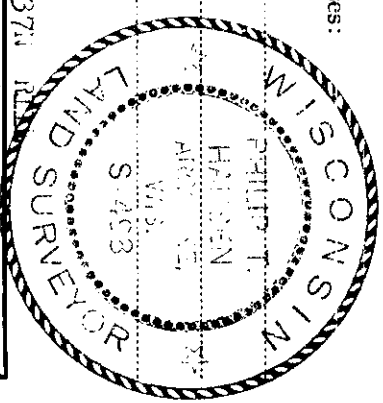

○ = Corner monument restored.

History of original corner establishment:

Original corner established by J.D. Melroy, when lumber 40' cedar pole curve or, in 1916. Set 4 x 4" cedar post and marked PT's - Pine stump 40" x 30" x 45" links and pine stump 30" x 50" x 54" links. Corner recovered by H.D. Lawrence, registered Land survey or, in 1954. Found Melroy's cedar post and PT's. Set new cedar post and marked PT's - Cedar 9" x 88" x 135" links, hemlock 8" x 42" x 372" links.

Description of corner evidence found:

Recovered Lawrence's 9" cedar post, squared and scribed 04, 03, 04, 05. Also Melroy's old post, dired to Lawrence's post, scribing still visible 40 - 45. Recovered Melroy's - pine stump 40" x 36" x 42" links, scribing no longer visible. Pine stump 30" x 50" x 54" links, bases of stump found from scribe marks. Cedar 9" x 88" x 135" links, set with scribe marks, 04, 03. Hemlock 8" x 42" x 372" links, set a cut off stump.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced wood post with 2" iron pipe with brass cap stamped: 1976. 0493
 monument projects 4" above ground. 1976. 0416
 08T - angle 9" x 70" x 140" links, scribed 04, 05. 01/4 01/4
 0498 9" x 86" x 137" links, scribed 04, 05. 01/4 01/4
 0499 9" x 88" x 140" links, scribed 04, 05. 01/4 01/4
 monument and PT's painted blue. 01/4 1976

Dated at Oneida, Wis., this 30th day of August, 1976.

Signature Phillip P. Hansen Title Registered Land Surveyor Registration No. 5-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 23rd day of September, 1976.
 at 10 o'clock P. M.

Dona Berge Kuehn
 (Register of Deeds)

By: _____ Deputy