CERTIFIED LAND CORNER RESTORATION

Index No. L-22

State of Wisconsin } ss.
County of Oneida }

I Philip T. Hansen, do hereby certify that on the 18th day of August, 1976, I found evidence of the NC 1/16 corner of Section 13 Township 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Claflin

Herb Lagoner

T37N R11E

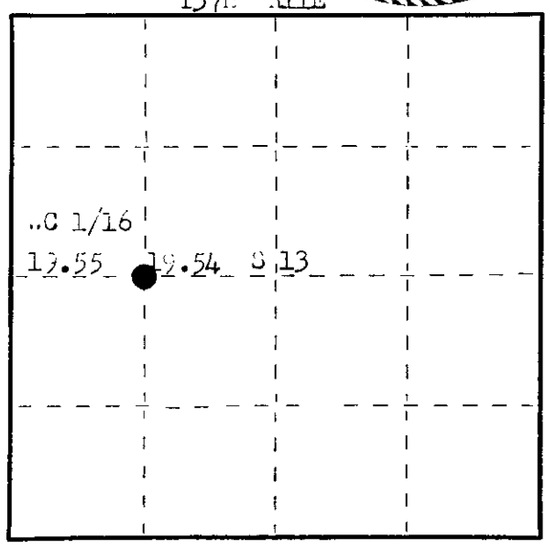

○ = Corner monument restored.

History of original corner establishment:

Corner established by J.J. Melendy, Gagen Lumber and Cedar Company Surveyor, in 1918.
Set 5 x 5" cedar post at 19.55 chains east of N 1/4 Corner.
Marked MBT - Cedar 12" S 50° W 32½ links.

Description of corner evidence found:

Unable to recover Melendy's wood post. Recovered his cedar BT - 12". Apparently he made an error in his notes as the face of his BT faced N 50° W. A careful search did not turn up any evidence of his post. This area had been heavily logged in the past and may have destroyed the corner. Using the N 50° W 32.5 links ties, set our new corner.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1¼" iron pipe with 2" brass cap stamped:
Monument projects 24" above ground.
Drove support stakes beside iron pipe.
MBT's - Cedar 7" N 36° W 28.1 links, scribed 1/16 BT.
Cedar 10" N 58° E 23.1 links, scribed 1/16 BT.
Monument and BT's painted blue.

S498
T37N R11E
NC 1/16 S | 13
SEP 1-1976

Dated at Rhinelander, Wis., this 1st day of September, 19 76.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 29th day of September, 19 76 at 2:30 o'clock P. M.

Doris Verage Kuehn
(Register of Deeds)

By ..... Deputy

FORM 985 H. C. MILLER CO., MILWAUKEE