
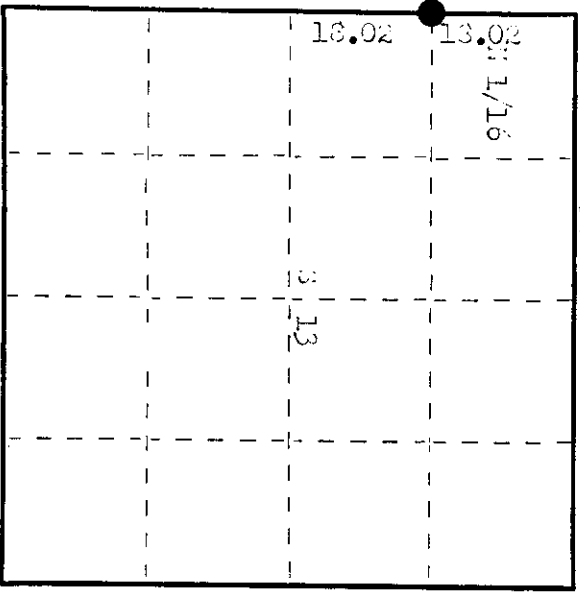


State of Wisconsin }  
 County of Oneida } ss.

I Phillip T. Janson, do hereby certify that on the 19th day of August, 1976, I found evidence of the 1/16 corner of section 13 & 14 Township 37 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:  
 Glenn Barker  
 Jim Mattson  
 Herb Anderson

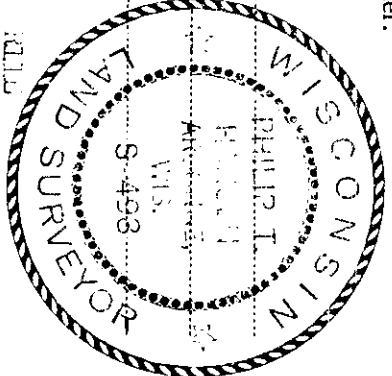

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

Index No. **K-21**

History of original corner establishment:

Corner established by J. J. Tolendy, Regen Hunter & Cedar Company surveyor, in 1918. Set 4" x 4" post 18.02 chains equidistant between 1/4 and section corner. Marked 20" x 1" - 24" x 0" - 25 links and 24" x 4" - 23" x 21 links.

Description of corner evidence found:

Recovered 4" square cedar post, scribbled 1/16 visible on one side, post in very poor condition.  
 Recovered 4" x 24" x 0" x 25 links, not iron and dark.  
 Recovered 4" x 23" x 21 links, not a decorated stump.  
 Corner sets in 24" x 24" x 0" x 25 link road barrier.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced old cedar post with 1 1/2" OD iron pipe with 2" brass cap stamped:  
 1876 ALL  
 1/16 14 13  
 9493  
 1876 ALL  
 1/16 14 13  
 WI-1976

Dated at Oneida, Wis., this 19th day of August, 1976.

Signature *Phillip T. Janson* Title Registered Land Surveyor, or other duly authorized official Registration No. 9493  
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida  
 Instrument was filed in this office for record on the 29th day of September, 1976 at 2:30 o'clock P.M.

*Louis Verage Kuehn*  
 (Register of Deeds)

By \_\_\_\_\_ Deputy

3711143000