

CERTIFIED LAND CORNER RESTORATION

M-12 Index No. N-12

State of Wisconsin


County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 15th day of July, 1975, I found evidence of the E-1/16 corner of Sections 16 and 21


Township 37, North, Range 11 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

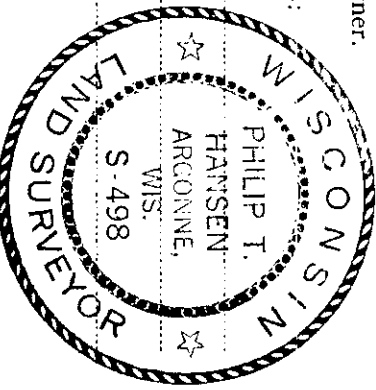

T37N, R11E

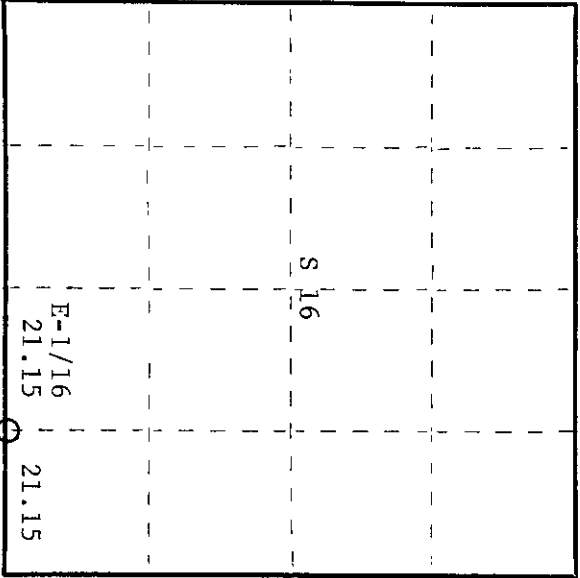

○ = Corner monument restored.

History of original corner establishment:

Corner established by V.M. Maine, County Surveyor, in 1937. He ran a random line east, var. 1-1/20E from Section Corners 16, 17, 20, and 21, 84.60 chains, to intersect the east line 3.76 chains north of Section Corners 15, 16, 21, and 22. Corrected line, set E-1/16 corner at 63.45, 28.17 chains south. Set a 5" cedar post from which black ash 9", bears N30W, 24 lks. and cedar 7", bears N790E, 24 lks.

Description of corner evidence found:

Recovered 5" cedar post squared and scribed 1/8 S in very poor condition.


Recovered OBT's Black ash 9", N30W, 24 lks. Now a decayed stump.

Cedar 9", N790E, 24 lks. Tree was down and moss covered, but scribing 1/8 S visible. Other scribe marks but not legible.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced wooden post with 1-1/2" O.D. iron pipe w/brass cap stamped - S498 T37N, R11E

NBT's Black spruce 7", N250W, 30.4 lks. scribed 1/16 BT.



CPI-1975

Dated at Rhineland, Wis., this 29th day of July, 1975.

Signature Philip T. Hansen Title Registered Land Surveyor Construction No. S-498  
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida hereby certifies that the within instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M.

Doris George Tucker  
 (Register of Deeds)

By: \_\_\_\_\_ Deputy

0100071160010