


CERTIFIED LAND CORNER RESTORATION

Index No. N-7
N 7


State of Wisconsin }
County of Oneida } ss.

I, Philip T. Hansen, do hereby certify that on the 17th day of April, 1975, I found evidence of the 1/2 corner corner of Sections 17 and 20 Township 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

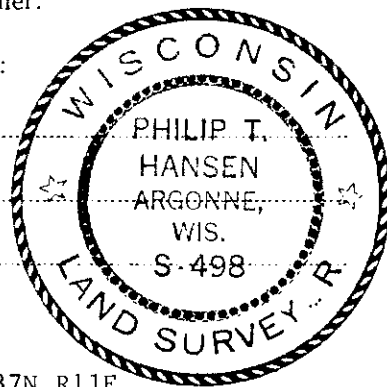

FORM 985 H. C. MILLER CO., MILWAUKEE

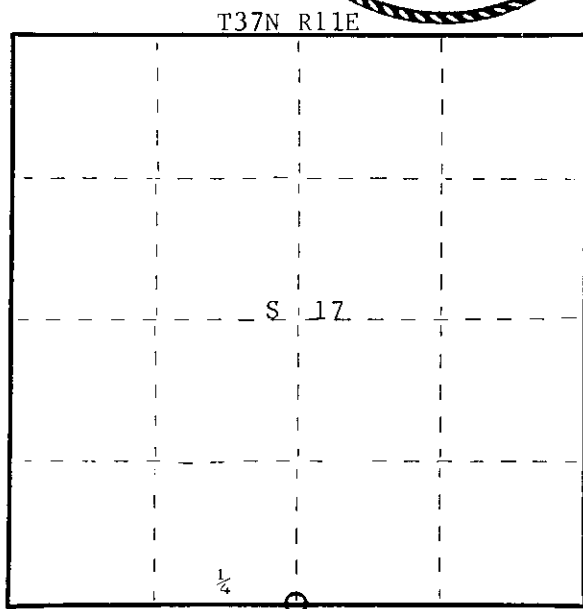

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Gov. Deputy Surveyor, in 1859, from which cedar 8" bears S24°E 10 links, and tamarack 8" bears N32°W. Corner re-established by H.C. Lawrence, Registered Land Surveyor, in 1948, from his re-established corners S16, S17, S20 and S21; and Sections 17, 18, 19, and 20. Set a new tamarack post in centerline of abandoned road along N-S 1/2 line with its intersection with E-W section line road. Maine established a corner 9 links S71°W from this point. No bearing trees mentioned in notes.

Description of corner evidence found:

Recovered a 3" tamarack post, squared and scribed 1/2 S S17, 1/2 S S20, in very poor condition. Post had rotted off, but point was still intact.
Recovered Maine's 2 1/2" iron pipe S71°W 9 links.

No OBT's were recovered.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced old point of Lawrence's post with 2 1/2" iron pipe with brass cap stamped - S498

NBT's - black spruce 7" S31°E 25 links; scribed 1/2 BT.
Black spruce 9" S61°W 60 links; scribed 1/2 BT.

T37N R11E
1/2 S | 17
S | 20

CPI-1975

Dated at Rhineland, Wis., this 10th day of July, 1975.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P M.

Doris Terage Kuehn
(Register of Deeds)

By _____ Deputy

371170020