

CERTIFIED LAND CORNER RESTORATION

Index No. **Q-17**


History of original corner establishment: Corner established by H.C. Lawrence, Registered Land Surveyor, in 1948. He ran the random line South 20 35' East from the 1/4 corner a distance of 40.60 chains to a point 34 links West of the SW corner. Set S-1/16 at 20.30 chains equidistant and 17 links East.

State of Wisconsin } ss.
 County of Oneida }

I Phillip T. Hansen, do hereby certify that on the 5th day of December, 1975, I found evidence of the S-1/16 corner of Section 22 and 23 Township 37 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker
 Jim Clafin

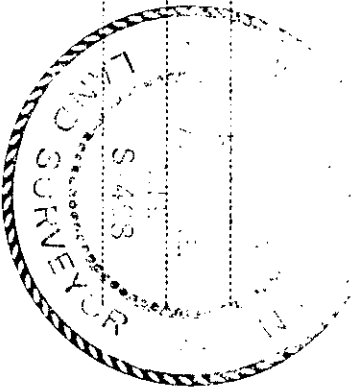

Description of corner evidence found: Recovered 4" cedar post, squared and scribed S-1/16 S22 S-1/16 S23 in poor condition.


Recovered BT's - Balsam 10" S21°W 62 links now blown down and dead
 Maple 8" (11") S79°E 9.5 links scribing grown over

Description of monument and accessories I established to perpetuate the original location of this corner.
 Replaced 4" cedar post with 1-1/2" O.D. iron pipe with 2" brass cap stamped -
 Pipe projects 1' above ground.

NBT's - Maple 6"	S28°E	27.4 links	scribed 1/16 BT	S498
S. Maple 6"	S47°W	16 links	scribed 1/16 BT	T37N R11E
				S-1/16 S 23

Pipe and BT's painted blue.

CPI-1975

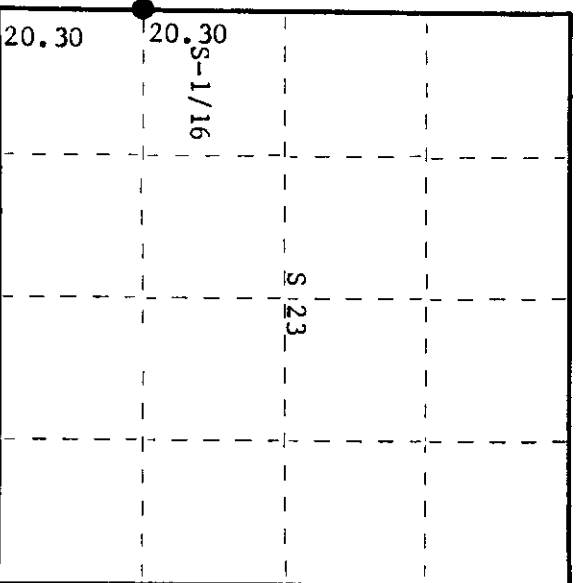

○ = Corner monument restored.

Dated at Rhinelander, Wis., this 9th day of December, 1975

Signature: *Phillip T. Hansen* Title: Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
 Instrument was filed in this office for record on the 4th day of January, 1976
 at 1:30 o'clock P.M.

George Kuehn
 (Register of Deeds)

By: _____ Deputy

371122/000