

CERTIFIED LAND CORNER RESTORATION



R 19
Index No. R-19

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 6th day of May, 1975, I found evidence of the Quarter corner of Sections 23 and 26 Township 37 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

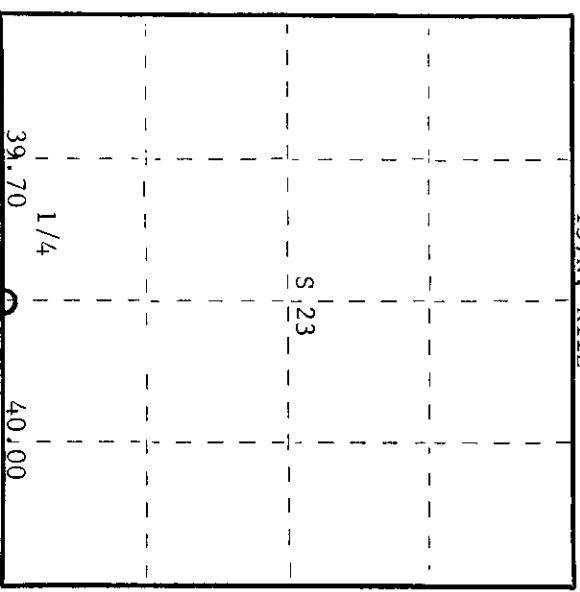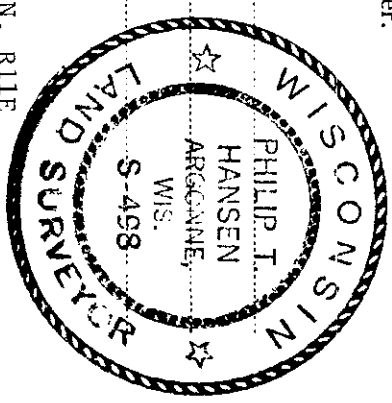

○ = Corner monument restored.

History of original corner establishment:
Original corner established by Wm. E. Dougherty, Government Deputy Surveyor, in 1859, from which sugar maple 12" bore S130E, 8 links and white birch 8" bore N820E, 23 links. Corner recovered by J.A. Melendy in 1916.
Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1949 during his retracement survey. He found the fire-scarred post lying on the ground, but found the old point and set new post from which he made bearing trees sugar 5" West 76 links and balsam 10" S890W 76 links.

Description of corner evidence found:
Recovered H.C. Lawrence's cedar post, squared and scribed S23 1/4-S; S26 1/4-S, in fair condition. Also, a 4" cedar post, squared and scribed 1/4-S 23 1/4-S 26, lying beside it in very poor condition.
No trace of old bearing trees.

Description of monument and accessories I established to perpetuate the original location of this corner.
Replaced Lawrence's 5" cedar post with 2-1/2" galvanized iron pipe with brass cap stamped -
Set NBT - White spruce 7" N100W 22.8 links scribed 1/4 BT
White spruce 6" S260E 14.3 links scribed 1/4 BT
T37N, R11E
S498

1/4 S 23
S 26

CPI-1975

Dated at Rhinelander, Wis., this 15th day of May, 1975.

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)
Office of Register of Deeds, County of Oneida
at 3:00 o'clock P. M. 1st day of October, 1975
I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975.

Doris Savage Furlan
(Register of Deeds)

By: Deputy

3711220020