

CERTIFIED LAND CORNER RESTORATION

Index No. **Q-25**



State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 14th day of February, 1978, I found evidence of the S 1/16 corner of Sections 25 & 19 Township 37, North, Range 11 & 12 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

- Glen Barker
- Jim Claflin
- Herb Wagoner

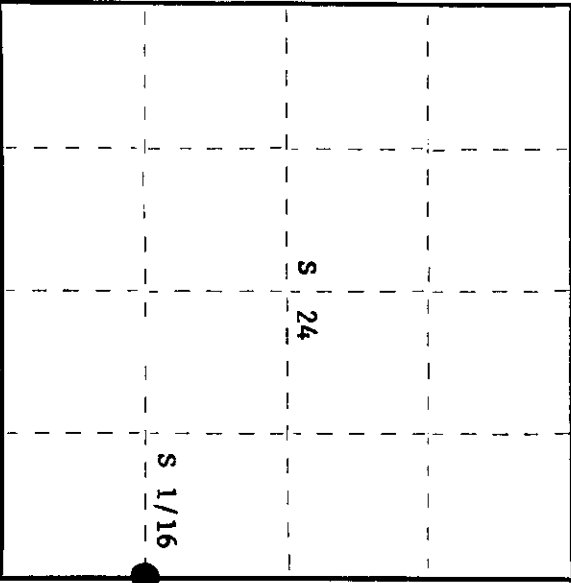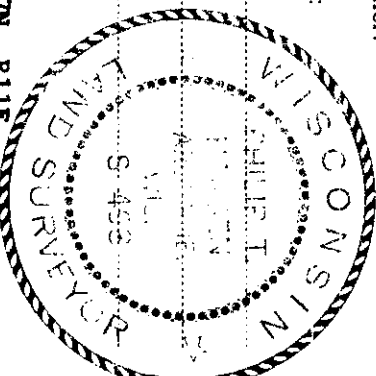

○ = Corner monument restored.

History of original corner establishment:

Corner established by V. Maine, County Surveyor, in 1935. Corrected line, set S 1/16 at 60.13 chains south of section corner 13, 24, 18, 19.

Set cedar post.

- BT's - spruce 6" S49° 50' E, 9 links
- spruce 5" S60° 30' W, 25 links
- spruce 5" N63° W, 29 links

Description of corner evidence found:

Recovered Maine's 3" cedar post, squared and scribed 1/8S - S19 - 1/8 S - S29.

Post standing in very poor condition.

Recovered OBT's - black spruce 6" S49° 50' E, 9 links, now a 12' stub, scribed 1/8S BT. black spruce 5" S60° 30' W, 25 links (25.9 lks) - now dead, scribed BT.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced post with a 1 1/2" o.d. iron pipe with 2" brass cap, stamped:

- NBT's - black spruce 6" N84° E, 25.3 links
- black spruce 7" S40° W, 47.2 links
- scribed 1/16 BT.

S498  
T37N R  
11 S 1/16 24 19 12  
E  
CPI-1978

Dated at Rhineland, Wis., this 8th day of March, 1978.

Signature: Phillip T. Hansen Title: Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida.  
Instrument was filed in this office for record on the 13th day of March, 1978 at 2:30 o'clock P. M.

Dorcas Venage Frazier  
(Register of Deeds)

By: \_\_\_\_\_ Deputy

3711241000