
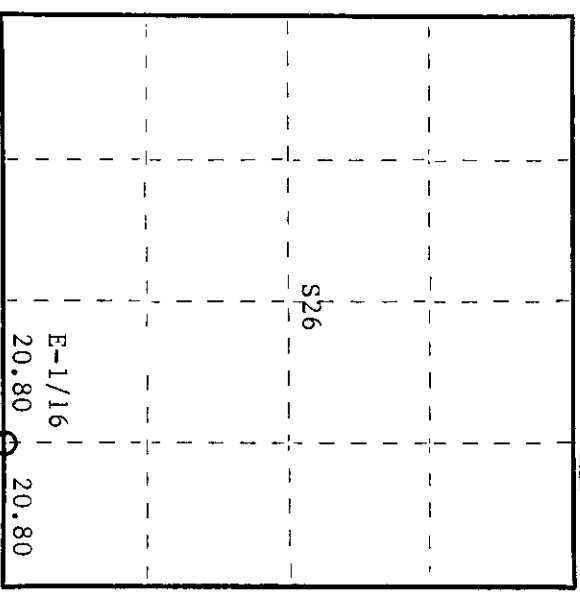


State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen 17th day
 certify that on the April 19 75, I found
 evidence of the E-1/16
 corner of Sections 26 and 35
37, North, Range
11 East, Fourth Principal Meridian,
 as described hereon; and that from this evidence
 I established a new monument and accessories
 as described hereon to perpetuate the original
 location of this corner.

Resident witnesses.

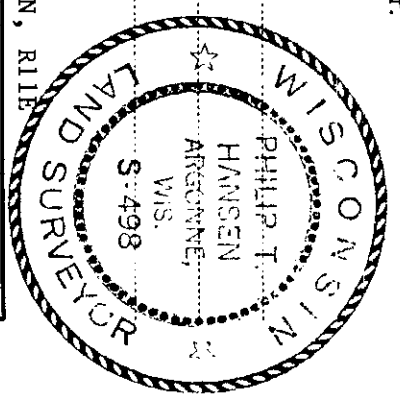

○ = Corner monument restored.

History of original corner establishment:
 Corner established by V.M. Maine in 1938; from which hemlock bears S34°E 29 links
 and hemlock 6" bears N41°W 18 links.

Corner restored in 1948 by H.C. Lawrence, Registered Land Surveyor. Set new cedar
 post. Pine stump 30" bears S87½°E 32 links and hemlock bears S34°E 29 links.

Description of corner evidence found:
 Recovered 5" cedar post, squared and scribed S26 E-1/16, S35 E-1/16 in very poor
 condition; also, 1-1/2" iron pipe.

ORF's - Hemlock 11" S35°E 30.5 links, scribed E-1/16 S35 BT. Tree now is dead.

Description of monument and accessories I established to perpetuate the original location of this corner.
 Replaced wooden stake and 1-1/2" iron pipe with 1-1/2" O.D. iron pipe with 2" brass cap stamped -

NBT's - Sugar maple	5"	N28°E	43.3 links	T37N, R11E	S498
Sugar maple	6"	N48°W	78.4 links, scribed 1/16 BT		
				E-1/16	S 26
					S 35
					CPL-1975

Dated at Rhineland, Wis., this 3rd day of June, 1975

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
 instrument was filed in this office for record on the 1st day of October, 1975
 at 3:00 o'clock P. M.

Terrie Vergey Kuehn
 (Register of Deeds)

By: _____ Deputy