

CERTIFIED LAND CORNER RESTORATION



U 19 Index No. 21-19

State of Wisconsin

County of Oneida } ss.

I, Philip T. Hansen, do hereby certify that on the 20th day of June 1975, I found evidence of the SC-1/16 corner of Section 26 Township 37 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

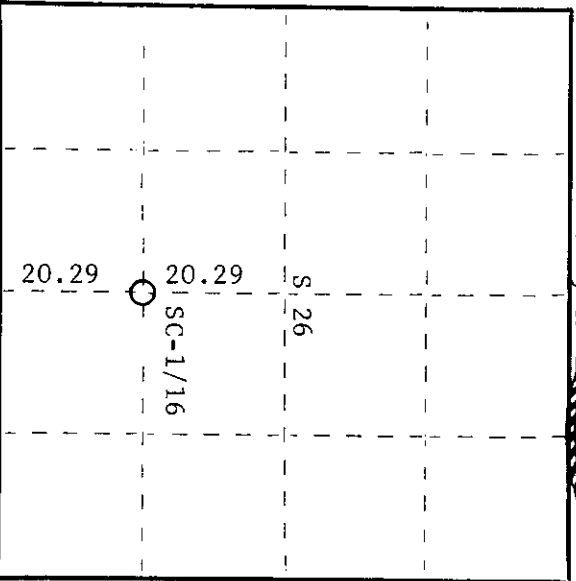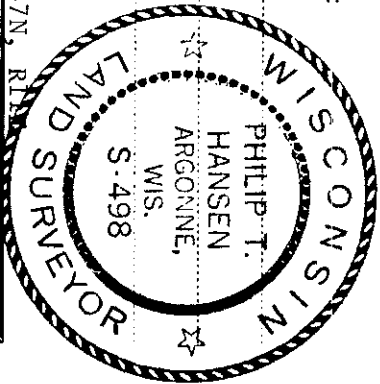

○ = Corner monument restored.

History of original corner establishment: Corner established by H.C. Lawrence, Registered Land Surveyor, in 1949 during his retracement and subdivision survey. He ran the North-South 1/4 line 1°00'W var. from the 1/4 corner between Section 23 and Section 26. Intersected the line between Section 26 and Section 35, 19 links West of established 1/4 corner. Ran East-West 1/4 corner West on needle (var. 1°30'E), 81.48 chains to intersect the true line to establish G-1/4 corner. SC-1/16 corner set equidistant between C-1/4 corner and S-1/4 corner at 20.29 chains, 60.53 chains South of N-1/4 post. No suitable trees near for BT's.

Description of corner evidence found:
Recovered Lawrence's 4" cedar post, squared and scribed SC-1/16 S26, SC-1/16, in very poor condition. Post had rotted off and was lying on the ground covered with moss.
Recovered point of stake in ground.

No BT's recovered.

Description of monument and accessories I established to perpetuate the original location of this corner.
Replaced point of old stake with 1 1/2" OD iron pipe with 2" brass cap stamped -

NBT's - Cedar 6"	N84°W	45.4 links	scribed 1/16 BT	T37N, R11E
Red maple 5"	S25°E	22.8 links	scribed 1/16 BT	S498
				SC-1/16 S 26
				CPI-1975

Dated at Rhineland, Wis. this 16th day of July, 1975.

Signature: *Philip T. Hansen* Title: Registered Land Surveyor Registration No. S-498
County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Registrar of Deeds, County of Oneida
Instrument was filed in this office for record on the 1st day of October 1975
at 3:00 o'clock P.M.

Dona Verge Tuckey
(Register of Deeds)

By: Deputy

3711261020