

CERTIFIED LAND CORNER RESTORATION

Index No. **U-15**

State of Wisconsin

County of Oneida } ss.

History of original corner establishment:
Corner established by H.C. Lawrence, Registered Land Surveyor. Set corner at 20.07 chains north of re-established S-1/4 corner equidistant between S-1/4 and G-1/4 corner. Set 4" cedar post and marked NBT's. Burned W. pine stump 36" S320E, 74 lks.


I Phillip T. Hansen, do hereby certify that on the 4th day of November, 19 75, I found evidence of the SC-1/16 corner of Section 27 Township 37 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Description of corner evidence found:
Recovered 4" cedar post, squared and scribed SC-1/16, S27, SC-1/16 in poor condition.
Recovered 0BT. Burned W. pine stump S32⁰E, 74 lks., scribed SC-1/16 B.O.

Resident witnesses:


Glen Barker

Jim Claflin

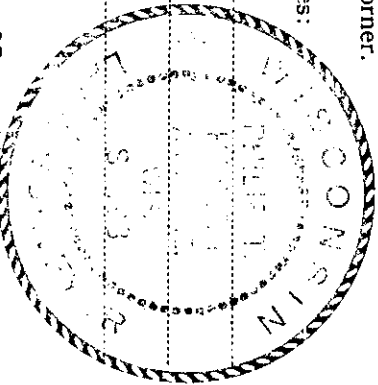

Description of monument and accessories I established to perpetuate the original location of this corner.
Replaced 4" cedar post with 1" O.D. iron pipe with 2" brass cap stamped - S498
Pipe projects 18" above ground. T37N, R11E
NBT's - W. spruce 9" N76⁰W 23.6 lks. Scribed 1/16 BT.
B. spruce 4" N68⁰E 40 lks. Scribed 1/16 BT.
Pipe and BT's painted blue. S'27
SC-1/16

CPI-1975

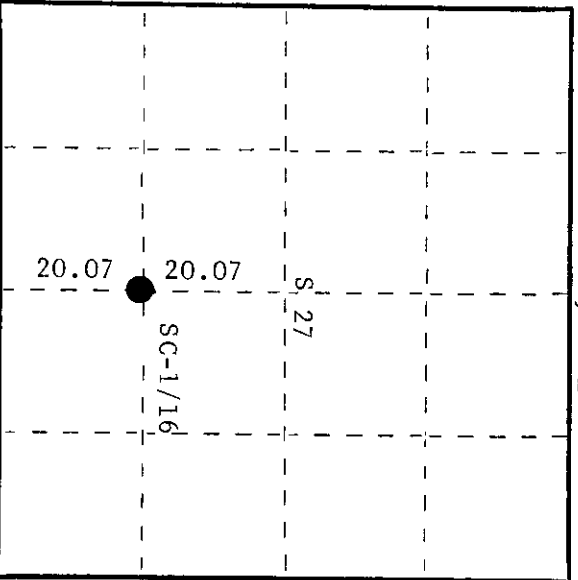

O = Corner monument restored.

Dated at Rhineland, Wis., this 11th day of November, 19 75.

Signature: *Phillip T. Hansen* Title: Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 11th day of November, 19 75. I hereby certify that the within at 10:00 o'clock A.M. *Thomas George Fiedler* Register of Deeds

By: _____ Deputy

3711271020