

CERTIFIED LAND CORNER RESTORATION

Index No. **T-15**

State of Wisconsin

County of Oneida } ss.


I Philip T. Hansen, do hereby certify that on the 4th day of November, 1975, I found evidence of the C-1/4 corner of Section 27

Township 37 North, Range 11 East, Fourth Principal Meridian,


as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker
Jim Claflin

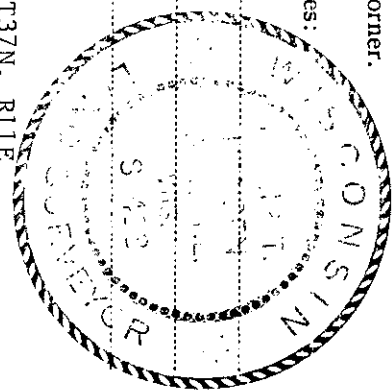

T37N, R11E

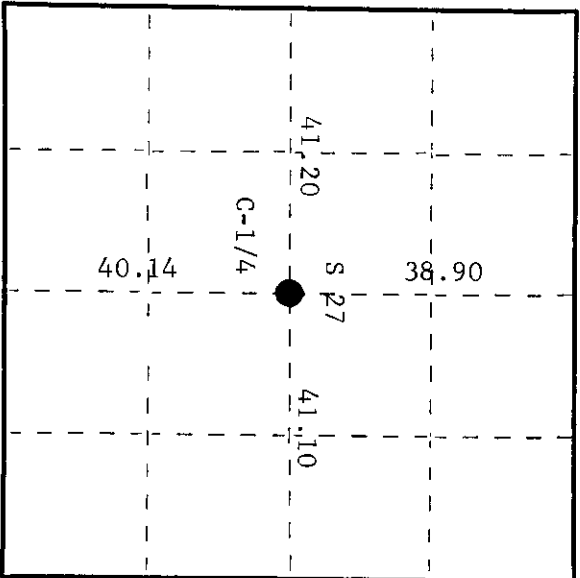

○ = Corner monument restored.

History of original corner establishment:

Corner established by H.C. Lawrence, Registered Land Surveyor, in 1949. Ran E-W and N-S 1/4 lines from established 1/4 corners. Corrected and set new post at C-1/4 corner, 38.90 chains south of north 1/4 and 40.14 chains north of south 1/4. Corner is 41.10 chains west of E-1/4 and 41.20 chains east of W-1/4. Sets at south border of open grassy area. Marked NBT's - aspen 14" S1°30'W, 122 lks. No other trees suitable for BT's.

Description of corner evidence found:

Recovered 4" cedar post, squared and scribed C-1/4 S27, C-1/4 S27 in poor condition.
Recovered OBT - Aspen 14" S1°30'W 122.5 lks. Scribed C-1/4 S27 BT.
Now an 18" stub.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced 4" cedar post with 2-1/2" iron pipe with brass cap stamped - S498
Pipe projects 2 feet above ground.
NBT - W. spruce 5" S71°E 55 lks. Scribed 1/4 BT. T37N, R11E
No other trees suitable for BT's.
Pipe and BT painted blue. S'27
C-1/4

CPT-1975

Dated at Rhineland, Wis. this 11th day of November, 1975

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 11th day of November, 1976 at 10:00 o'clock A.M.

Louise Verage Kuehn
(Register of Deeds)

By _____ Deputy

3711272020