CERTIFIED LAND CORNER RESTORATION

Index No. V-11

State of Wisconsin } ss.
County of Oneida

I Philip T. Hansen, do hereby certify that on the 11th day of May, 19 76, I found evidence of the Quarter corner of Section 28 - 33 Township 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claflin

Herb Wagoner

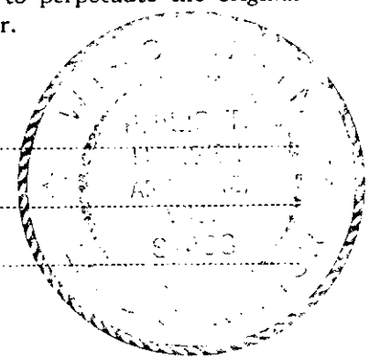

T37N R11E

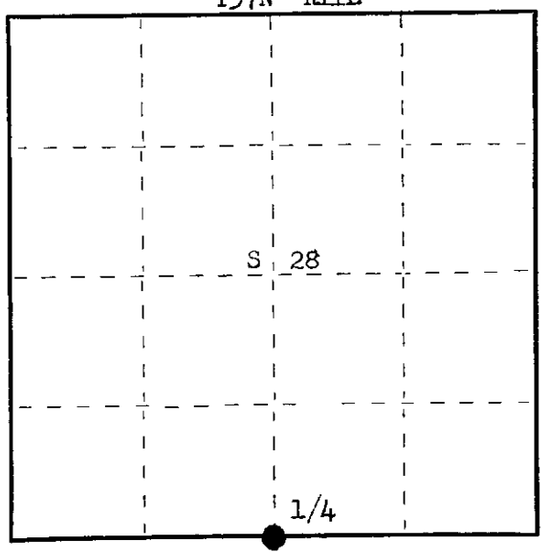

○ = Corner monument restored.

History of original corner establishment: Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1859, from which cedar 10" bears N 30° E 9 lks and cedar 9" bears S 35° W 14 lks.

Corner restored by J. M. Maine, County Surveyor. Set a 6" squared cedar post at 40.48½ chains equidistant and marked BTs - Ash 6" west 1½ lks, Ash 9" N65° 20' E 22½ lks, Ash 8" N24½W 28 lks and Ash 10" S10½°E 23½ lks.

Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1958.

Description of corner evidence found: Recovered 6" squared cedar post scribed 1/4S 528, 1/4S, S33 in poor condition. Also recovered a 2" iron pipe with brass cap, scribed T37-S28-R11 1/4 - S33. M in poor condition.
Recovered OBTs - Black Ash 6" west 1.5 lks - now a stump.
Black Ash 8" N24°W 28 lks, scribed BT - now dead.
Black Ash 8" (12") N65°W (N62°W) 22 lks, scribing not legible.
Black Ash 10" (14") S10°E 23.5 lks, scribed BT.

Description of monument and accessories I established to perpetuate the original location of this corner.
Due to poor condition of cedar post and Maine's iron pipe, replaced both with new 2" iron pipe with brass cap, stamped.
Pipe projects 18" above ground.
NBTs - Cedar 6" S62°W 38.0 lks, scribed 1/4 BT.
B.Ash 6" N18°W 22.4 lks, scribed 1/4 BT.
Monument and BTs painted blue

S498
T37N R11E
1/4 S28
S33
1976

Dated at Rhinelander, Wis., this 20th day of May, 1976

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 10th day of June, 19 76 at 2:20 o'clock P M.

Doris Grage Kuehn
(Register of Deeds)

By ..... Deputy

FORM 985

37112800020