CERTIFIED LAND CORNER RESTORATION

Index No. S-7

State of Wisconsin } ss.
County of Oneida }

I Philip T. Hansen, do hereby certify that on the 3rd day of September, 19 76, I found evidence of the NC 1/16 corner of Section 29 Township 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Claflin

Herb Wagoner

WISCONSIN
PHILIP T. HANSEN
S-498
LAND SURVEYOR

T37N R11E

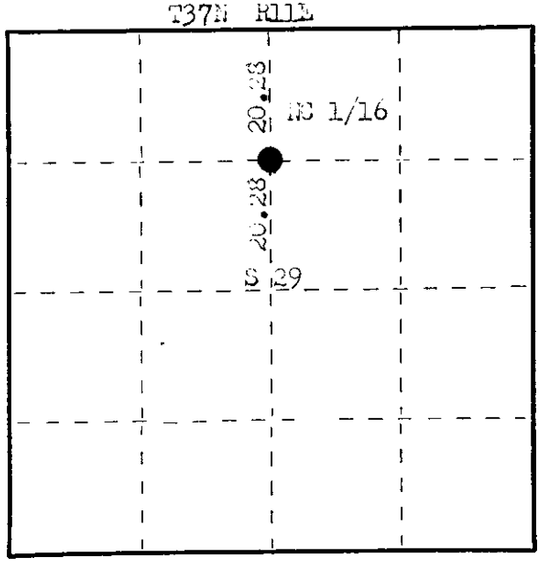

○ = Corner monument restored.

History of original corner establishment:
Corner established by H.C. Lawrence, Registered Land Surveyor, in 1951. Ran a random line South from Quarter Corner between Section 20 and 29, intersected E-W 1/4 line at point 42.04 chains West of E 1/4 corner or 18 links East of C 1/4 corner, at 40.56 chains. Set NC 1/16 corner at 20.28 chains intermediate 9 links West. Set cedar post and marked BT's - Spruce 7" B $46\frac{1}{2}^{\circ}$ E 42 links and Spruce 4" B $82\frac{1}{2}^{\circ}$ E 15 links.

Description of corner evidence found:
Recovered 3" squared Tamarack post down and decayed.

Recovered BT's - Black Spruce 7" (8") B 46° 30' E 4.5 links, scribed NC 1/16 BT.
Black Spruce 4" B 82° 30' E 15 links, scribed S29 BT.
From calls to Lawrence's BT's, was able to locate old post hole.

Description of monument and accessories I established to perpetuate the original location of this corner.
Replace old post with 1½" OD iron pipe with 2" brass cap stamped:
Monument projects 24" above ground.
NBT's - Black Spruce 7" B 26° E 21.5 links, scribed 1/16 BT.
Monument and BT's painted blue.

S498
T37N R11E
NC 1/16 | 29
CPI-1976

Dated at Rhinelander, Wis., this 7th day of September, 1976

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 29th day of September, 1976 at 2:30 o'clock P. M.

Doris Verage Kuehn
(Register of Deeds)

By ..... Deputy

FORM 985 H C MILLER CO., MILWAUKEE

371293030