

CERTIFIED LAND CORNER RESTORATION


Index No. V-4

State of Wisconsin


County of Oneida } ss.

History of original corner establishment:
Corner established by V. Malne, County Surveyor, in 1935.

I Phillip T. Hansen, do hereby certify that on the 3rd day of March, 1978, I found evidence of the E 1/16 corner of 30 & 31 Township 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

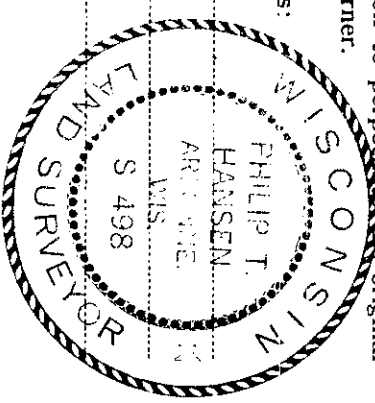

Resident witnesses:
Glen Barker
Jim Clafflin
Herb Wagoner

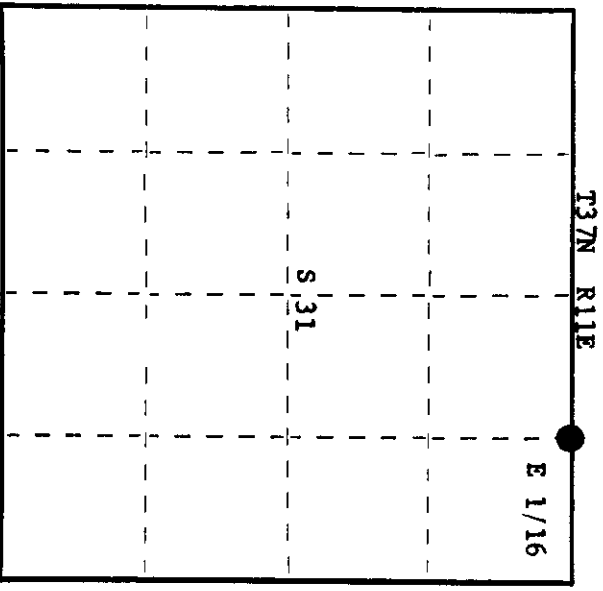

○ = Corner monument restored.

Description of corner evidence found:

Recovered hls 4" squared cedar post laying dead under snow, scribed 1/8S M. Recovered post point which has a rock cairn around it.

OBT - pine stump 86" which bears S40°E, 63 links, scribed M 1/8S B.T. (No record of B.T.)

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced post point with a 1 1/2" o.d. iron pipe with brass cap, stamped:
Placed rock cairn around pipe.

NBT's - maple 6" S30°E, 44.2 links S498
maple 6" S55°W, 42.2 links T37N R11E
scribed 1/16 BT E 1/16 S+30
CPI-1978 S+31

Dated at Rhineland, Wis., this 23rd day of March, 1978

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 10th day of April, 1978 at 10:30 o'clock a M.

Dawn Verage Kuehn
(Register of Deeds)

By _____ Deputy