

CERTIFIED LAND CORNER RESTORATION



Index No. **Z-3**

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 13th day of March, 1978, I found evidence of the Quarter corner of Section 31 & 6 Township 36 & 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:  
Glen Barker  
Jim Clafflin  
Herb Wagoner

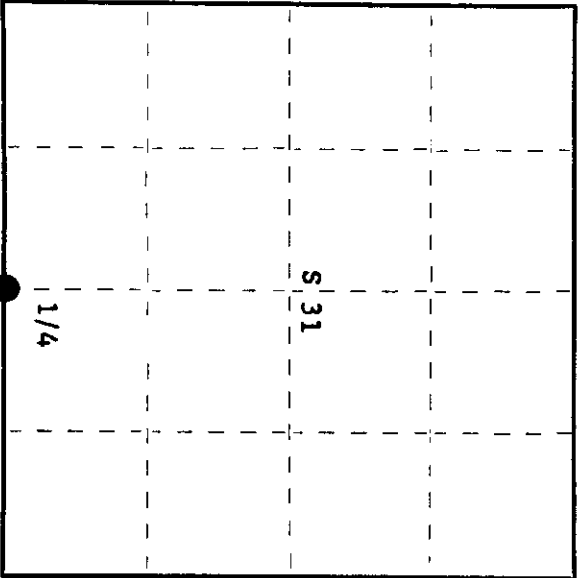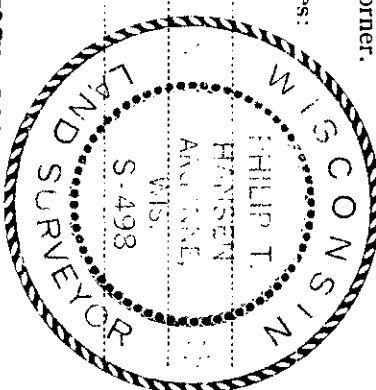

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Hiram C. Fellows, Deputy Surveyor, in 1858, from which fir 6" bears N44°W, 21 links and white pine 12" bears S40°E, 7 links. Corner set by V.M. Maine, but this was questioned by H.C. Lawrence in 1947, who claims to have recovered stump of original white pine with iron marks visible, from which he set his corner.

Set new post and marked NBT's - hemlock 18" S32°E, 43 1/2 links  
balsam 15" N29°W, 26 links.

Description of corner evidence found:

Recovered Lawrence's 6" cedar post, squared and scribed S31 T37N 1/4S, S6, T36N 1/4S R11E, standing but in very poor condition.  
Maine's iron pipe bears N3°W, 8.5 links from true corner.  
Recovered original pine stump S46°E, 7.5 links.  
OBT's - hemlock 18" S32°E, 43.5 links, now a rotted stump.  
balsam 15" N29°W, 26 links, scribed 1/4 S31, now dead.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced Lawrence's cedar post with 2 1/2" Berntsen A-1 federal monument, projecting 8" above ground. Cap stamped:  
Extracted Maine's iron pipe from ground and laid it at base of new monument.

Marked NBT's -  
sugar 10" S22°W, 14.3 links S498  
sugar 6" S19°E, 108.3 links T37N  
sugar 10" S45°E, 91.3 links R11E  
balsam 6" S74°E, 7.6 links  
all scribed 1/4 BT. 1/4 S+31  
T36N  
1978

Dated at Rhinelander, Wis., this 17th day of March, 1978

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498  
County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida  
Instrument was filed in this office for record on the 16th day of April, 1978  
at 10:30 o'clock A.M.

Louise George Kuehn  
(Register of Deeds)

By \_\_\_\_\_ Deputy

070012112M