



CERTIFIED LAND CORNER RESTORATION

Index No. **X-11**
X 11

State of Wisconsin }
 County of Oneida } ss.

I, Philip T. Hansen, do hereby certify that on the 27th day of March, 1975, I found evidence of the C-1/4 corner of Section 33 Township 37 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses.

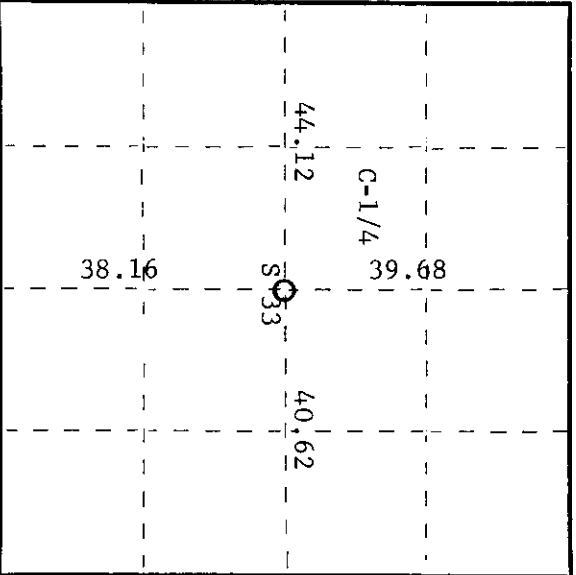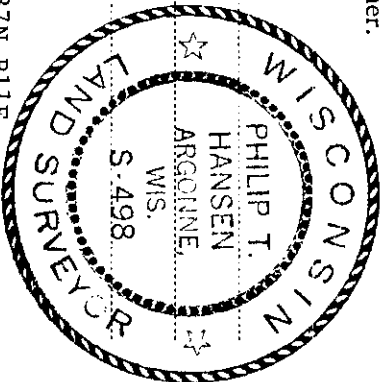

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

History of original corner establishment:
 Original corner established by V.M. Maine, County Surveyor.
 Recovered by H.C. Lawrence, Registered Land Surveyor, during retracement survey, 1952.
 Found Maine's C-1/4 corner intact. Set new 5" cedar post at 44.12 chs. east of W $\frac{1}{2}$ corner, 40.62 chains west of E $\frac{1}{2}$; 39.68 chains south of N $\frac{1}{2}$, and 38.16 chains north of S $\frac{1}{2}$ corner.
 N-S quarter line corrected bearing is N2°10'E.

Description of corner evidence found:
 Recovered 6" cedar post, squared and scribed G $\frac{1}{2}$ S S33, G $\frac{1}{2}$ S S33 in good condition. Rock carron had been built around base.
 No bearing trees recovered.
 Also found a 3" cedar stake due east on old random line with 33 scribed on it 68 links from H.C. Lawrence's corner.

Description of monument and accessories I established to perpetuate the original location of this corner.
 Replaced wooden post with 2 $\frac{1}{2}$ " galvanized iron pipe with brass cap stamped -

NBT - black spruce 6" N36°E 34.8 links scribed $\frac{1}{4}$ BT.
 Black spruce 8" N26°W 46.5 links scribed $\frac{1}{4}$ BT.

T37N R11E
 C-1/4 S 33

CPI-1975

Dated at Rhineland, Wis., this _____ day of _____, 19____

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
 Instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M.

Donna George Kuehn
 Register of Deeds

By _____ Deputy

3711332020