

CERTIFIED LAND CORNER RESTORATION

Index No. W-11

State of Wisconsin



County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 14th day of March, 1979, I found evidence of the NC 1/16 corner of Section 33 Township 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claflin

J. Nasbaum

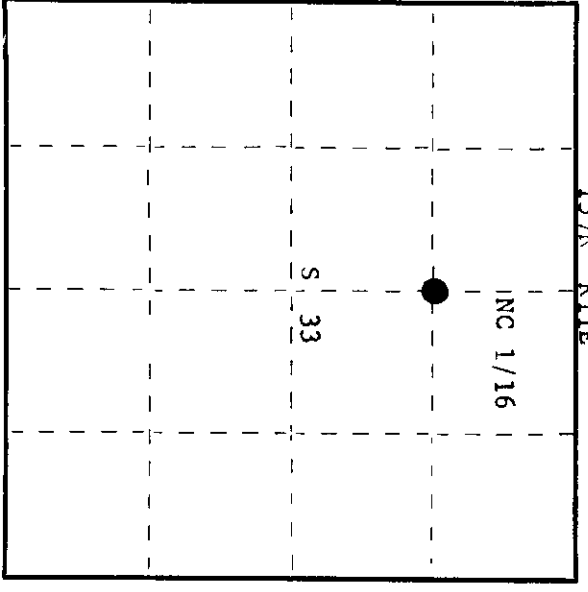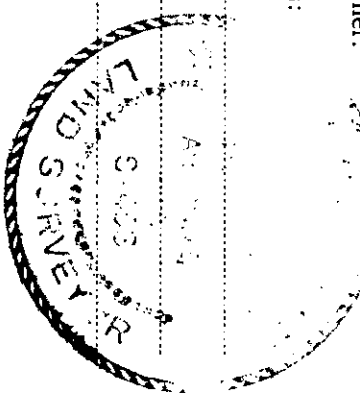

○ = Corner monument restored.

History of original corner establishment:

Corner established by V.M. Maine, County Surveyor, when he ran the N-S 1/4 line. H.C. Lawrence, Registered Land Surveyor, ran this line - found no trace of Maine's NC 1/16 corner. Set a new post for NC 1/16 at 1984 chains north of C 1/4 corner on corrected bearing of N 2° 10' E. Marked NBT's - Maple 20" N65°W 24 links White Birch 18" N38°E 65 links Set a 6" scribed cedar post for corner.

Description of corner evidence found:

Recovered H.C. Lawrence's 6" squared cedar post, scribed in fair condition and standing upright.
Recovered OBT's -
Maple 20" (26") N65°W 24.0 links (23.5 links) scribed S33 - NBT.
W. Birch 18" (24") N40°E 56.3 links, scribed NC 1/16 NBT.

Description of monument and accessories I established to perpetuate the original location of this corner.
Set a 1 1/2" iron pipe with 2" brass cap projecting 1 1/2", stamped:
Marked NBT - Sugar 6" S36°W, 54.3 links, scribed 1/16 BT.

S498
T37N R11E
NC 1/16 S + 33
CPI-1979

Dated at Rhineland, Wis., this 24th day of April, 1979

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)
Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 14th day of May, 1979
at 1:30 o'clock P. M.

By Terrie Savage Tucker
(Register of Deeds)

By _____ Deputy

371133 2020